



A. Wiegmann, L. Cheng, E. Glatt, O. Iliev, S. Rief

Design of pleated filters by computer simulations

© Fraunhofer-Institut für Techno- und Wirtschaftsmathematik ITWM 2009

ISSN 1434-9973

Bericht 155 (2009)

Alle Rechte vorbehalten. Ohne ausdrückliche schriftliche Genehmigung des Herausgebers ist es nicht gestattet, das Buch oder Teile daraus in irgendeiner Form durch Fotokopie, Mikrofilm oder andere Verfahren zu reproduzieren oder in eine für Maschinen, insbesondere Datenverarbeitungsanlagen, verwendbare Sprache zu übertragen. Dasselbe gilt für das Recht der öffentlichen Wiedergabe.

Warennamen werden ohne Gewährleistung der freien Verwendbarkeit benutzt.

Die Veröffentlichungen in der Berichtsreihe des Fraunhofer ITWM können bezogen werden über:

Fraunhofer-Institut für Techno- und
Wirtschaftsmathematik ITWM
Fraunhofer-Platz 1

67663 Kaiserslautern
Germany

Telefon: 06 31/3 1600-0
Telefax: 06 31/3 1600-1099
E-Mail: info@itwm.fraunhofer.de
Internet: www.itwm.fraunhofer.de

Vorwort

Das Tätigkeitsfeld des Fraunhofer-Instituts für Techno- und Wirtschaftsmathematik ITWM umfasst anwendungsnahe Grundlagenforschung, angewandte Forschung sowie Beratung und kundenspezifische Lösungen auf allen Gebieten, die für Techno- und Wirtschaftsmathematik bedeutsam sind.

In der Reihe »Berichte des Fraunhofer ITWM« soll die Arbeit des Instituts kontinuierlich einer interessierten Öffentlichkeit in Industrie, Wirtschaft und Wissenschaft vorgestellt werden. Durch die enge Verzahnung mit dem Fachbereich Mathematik der Universität Kaiserslautern sowie durch zahlreiche Kooperationen mit internationalen Institutionen und Hochschulen in den Bereichen Ausbildung und Forschung ist ein großes Potenzial für Forschungsberichte vorhanden. In die Berichtreihe sollen sowohl hervorragende Diplom- und Projektarbeiten und Dissertationen als auch Forschungsberichte der Institutsmitarbeiter und Institutsgäste zu aktuellen Fragen der Techno- und Wirtschaftsmathematik aufgenommen werden.

Darüber hinaus bietet die Reihe ein Forum für die Berichterstattung über die zahlreichen Kooperationsprojekte des Instituts mit Partnern aus Industrie und Wirtschaft.

Berichterstattung heißt hier Dokumentation des Transfers aktueller Ergebnisse aus mathematischer Forschungs- und Entwicklungsarbeit in industrielle Anwendungen und Softwareprodukte – und umgekehrt, denn Probleme der Praxis generieren neue interessante mathematische Fragestellungen.

A handwritten signature in black ink, appearing to read 'Dieter Prätzels-Wolters' with a stylized flourish at the end.

Prof. Dr. Dieter Prätzels-Wolters
Institutsleiter

Kaiserslautern, im Juni 2001

DESIGN OF PLEATED FILTERS BY COMPUTER SIMULATIONS

A. WIEGMANN, L. CHENG, E. GLATT, O. ILIEV AND S. RIEF
FRAUNHOFER ITWM, KAISERSLAUTERN, GERMANY

ABSTRACT. Four aspects are important in the design of hydraulic filters. We distinguish between two cost factors and two performance factors. Regarding performance, filter efficiency and filter capacity are of interest. Regarding cost, there are production considerations such as spatial restrictions, material cost and the cost of manufacturing the filter. The second type of cost is the operation cost, namely the pressure drop. Albeit simulations should and will ultimately deal with all 4 aspects, for the moment our work is focused on cost.

The PleatGeo Module generates three-dimensional computer models of a single pleat of a hydraulic filter interactively. PleatDict computes the pressure drop that will result for the particular design by direct numerical simulation. The evaluation of a new pleat design takes only a few hours on a standard PC compared to days or weeks used for manufacturing and testing a new prototype of a hydraulic filter. The design parameters are the shape of the pleat, the permeabilities of one or several layers of filter media and the geometry of a supporting netting structure that is used to keep the outflow area open. Besides the underlying structure generation and CFD technology, we present some trends regarding the dependence of pressure drop on design parameters that can serve as guide lines for the design of hydraulic filters. Compared to earlier two-dimensional models, the three-dimensional models can include a support structure.

Keywords: Solid-Gas Separation, Solid-Liquid Separation, Pleated Filter, Design, Simulation.

Date: April 28, 2009.

e-mail: (wiegmann, cheng, glatt, iliev, rief)@itwm.fraunhofer.de.

1. INTRODUCTION

Pleated filter panels are used in a variety of industrial applications, both for gas and liquid filtration. A pleated filter has a reduced pressure drop and improved particle collection efficiency compared to a flat sheet at the same base area [1]. For a given filter media and pleat height, for a low pleat count the pressure drop increases due to the reduced surface area of the filter media. For a high pleat count, the pressure drop increases due to viscous drag in the channels. Thus, there exists an optimal pleat count that has the lowest pressure drop for given filter media and pleat height [1]. Similar effects exist also when a support structure is used to keep the outflow and inflow channels of the pleat open. This structure, yet it obstructs the channel and the surface of the support structure effectively, also reduces the available surface area of the filter media.

Designing pleats by numerical simulations has been the objective of several studies in the past. In the absence of a support structure, two-dimensional simulations suffice [1, 8, 7, 9]. Truly three-dimensional pleat property simulations are now becoming feasible due to better models and increased computer power [11]. Several ways of coupling the free flow in the channels with the porous media flow in the media were tried: From Darcy-Lapwood-Brinkmann [1], Stokes-Darcy [8, 7, 9] to Stokes-Brinkmann [5, 11]. Also, on the discretization side, different methods were tried: from finite elements [1, 8, 7, 9] to finite volumes on collocated grids [5], a Lattice-Boltzmann approach in [11] and finally here we use the SIMPLE method [6] on staggered grids [4]. In all the literature, a single pleat is looked at to decrease the required computational power. It is sometimes referred to as the repetitive unit or periodicity cell.

In this work, a simple to use integrated simulation tool for the design of pleated filter panels is described and validated. The tool

- creates the pleat from parameters such as pleat height, pleat count, media thickness etc.
- creates nettings and woven support structures adapted from [3].
- allows to assign the permeability to one or several layers of the filter media.
- automatically sets up the computational grid and boundary conditions.
- computes the pressure drop from flow rate, fluid density and fluid viscosity [2].

2. VIRTUAL PLEATS

A virtual pleat is generated completely automatically from a few parameters. For the simplest case without support structure, the parameters are

- Inlet length (inflow region)
- Outlet length (outflow region)
- Up to 5 layers and thickness for each
- Pleat depth (a single voxel for 2d simulations)
- Pleat height
- Layer material types
- Pleat opening angle
- Pleat radius at inlet (pleat radius top)

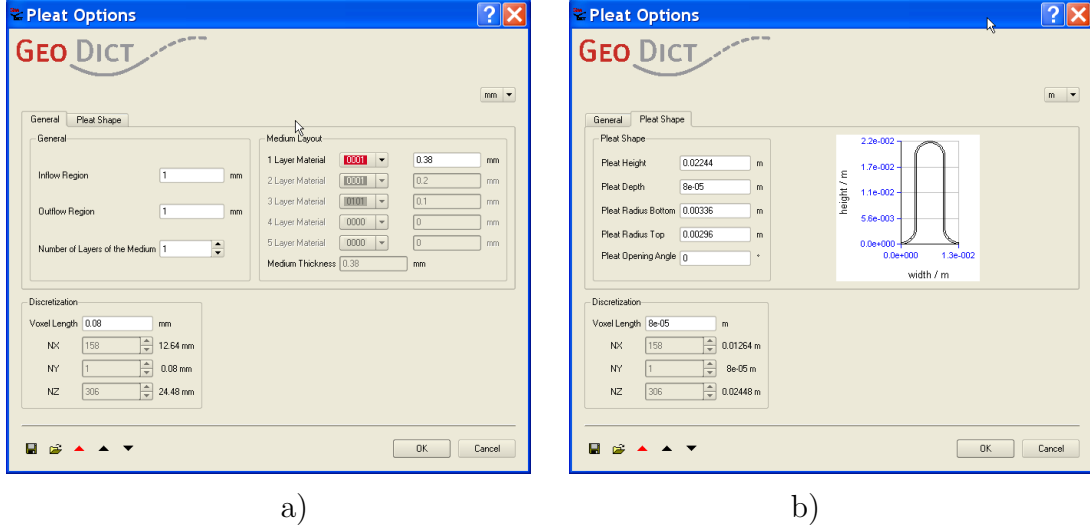


FIGURE 1. a) General pleat options and b) Pleat shape options. Setting the pleat depth to the voxel length conveniently creates the two-dimensional computational grid.


- Pleat radius at outlet (pleat radius bottom)
- Voxel length (the resolution for the simulation)

Figure 1 illustrates how the parameters are entered into the graphical user interface (GUI). Changing the height, radii (i.e. the pleat width) or opening angle are instantaneously illustrated by a drawing.


For pleated structures with supporting netting or supporting mesh, the depth of the pleat is chosen automatically as a repetitive cell of the netting or the woven structure. Additional parameters in this case are two wire diameters, the pitch in both directions (the aperture is then automatically determined from wire thickness and pitch), the wire overlap, the impression depth of the wires into the media, the type of weave etc. Figure 2 a) - c) illustrate how the additional parameters get entered into the GUI.

Figure 2 d) illustrates how the data is used for a parameter study in the case of a pleat without a supporting structure. In the first block of the .gvm (for GeoDict vary macro) file, the parameters for the pleat structure generation are specified. In this case, variables for the pleat height (% 2) and the pleat width (% 3, % 4) are used, because these are parameters varied in an example from the literature [1] that is reproduced in the results section. In the second block of the .gvm file, the parameters for the computation of the pressure drop are specified. Again, a variable (% 1) is used to vary the permeability of the media. Three more variables are used to create a meaningful file name for the parameter study, namely the media identity number (% 5), the pleat height (% 6) and the pleat count (% 7). The values for all variables are defined in the calling .gmc (for GeoDict macro) file, see Figure 3.


The media is determined by its name (Variable 5 or %5 in the .gvm file), which is chosen as in [1], and by its permeability (Variable 1 or % 1 in the .gvm file). The height is given in [mm] as used in GeoDict (Variable 2 or % 2 in the .gvm file) and in

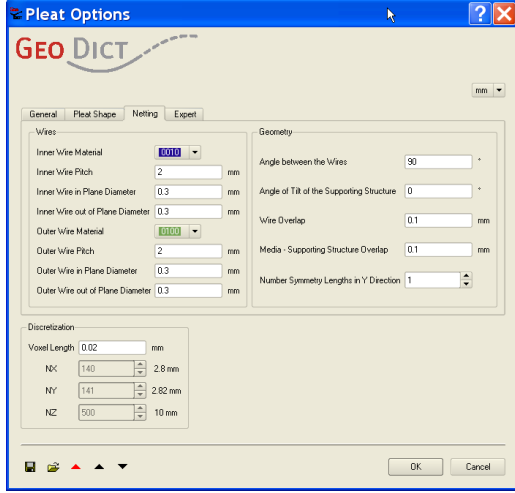

a)

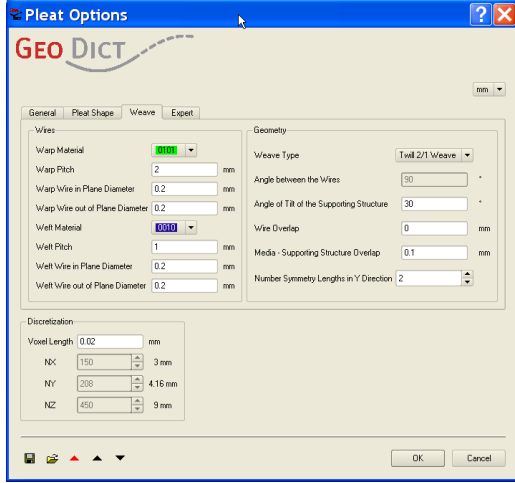

b)

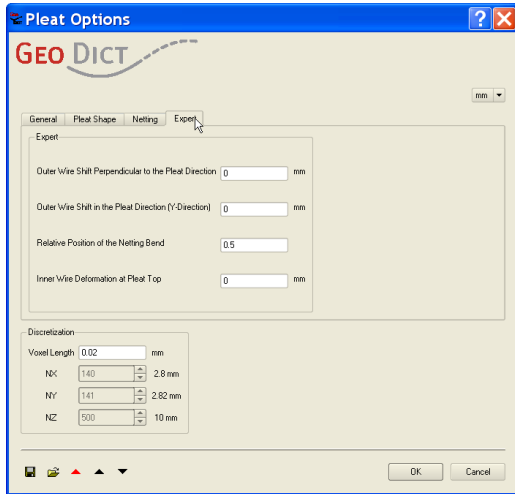

c)

```

PleatGeo:WithoutSupportingMesh {
  FileName
  InflowRegion 0.001
  MediaThickness1 0.0004
  MediaThickness2 0
  MediaThickness3 0
  MediaThickness4 0
  MediaThickness5 0
  NumberLayers 1
  OutflowRegion 0.001
  PleatDepth 8e-05
  PleatHeight %2
  PleatMaterial1 1
  PleatMaterial2 0
  PleatMaterial3 0
  PleatMaterial4 0
  PleatMaterial5 0
  PleatOpeningAngle 0
  PleatRadius1 %3
  PleatRadius2 %4
  VoxelLength 8e-05
}

PleatDict:SolveEFVStokesBrinkmann {
  NumberOfNodes 1
  Parameters:FluidDensity 1.204
  Parameters:FluidViscosity 1.834e-05
  Parameters:MeanVelocity 0.508
  Parameters:PressureDifference 0.02
  Parameters:PressureEnabled 0
  Permeabilities:Color1 %1,%1,%1
  Permeabilities:Color10 0,0,0
  Permeabilities:Color11 0,0,0
  Permeabilities:Color12 0,0,0
  Permeabilities:Color13 0,0,0
  Permeabilities:Color14 0,0,0
  Permeabilities:Color15 0,0,0
  Permeabilities:Color2 0,0,0
  Permeabilities:Color3 0,0,0
  Permeabilities:Color4 0,0,0
  Permeabilities:Color5 0,0,0
  Permeabilities:Color6 0,0,0
  Permeabilities:Color7 0,0,0
  Permeabilities:Color8 0,0,0
  Permeabilities:Color9 0,0,0
  RelaxationPressure 0.8
  RelaxationVelocity 0.5
  SolverData:Accuracy 1e-05
  SolverData:AddedFreeSpace 0
  SolverData:DirectionEnabledX 0
  SolverData:DirectionEnabledY 0
  SolverData:DirectionEnabledZ 1
  SolverData:DiscardTemporaryFiles 0
  SolverData:FileName Pleat_%5_%6_%7.gdr
  SolverData:MaxNumberOfIterations 100000
  SolverData:MirrorVolume 0
  SolverData:NumberOfProcesses 8
  SolverData:PermeabilityCheckInterval 20
  SolverData:Restart 0
  SolverData:RestartFileName
  SolverData:ScalingType 1
  SolverData:ScalingValue 1
  SolverData:SlipLength 0
  SolverData:SolverType 0
  SolverData:StoppingCriterion 1
}

```

d)

FIGURE 2. a) Netting support pleat options and b) Weave support pleat options. c) Expert pleat options and d) GeoDict Vary Macro File. The .gvm file contains the two commands that perform a parameter study namely the generation of the pleat and the computation of the pressure drop. The variables %1-%7 indicate the quantities that are varied under the parameter study.


```

GeoDict:VaryMacro{
  FileName pul.gvm
  NumberOfVariables 7
  Variable1:ValueList 7.25e-13,1.03e-12,2.26e-12,3.20e-12,7.68e-12,1.10e-11
  Variable1:CoupledWith NONE
  Variable2:ValueList 0.02224,0.04448,0.08888,0.13336
  Variable2:CoupledWith NONE
  Variable3:ValueList 0.00336,0.00232,0.00176,0.00144,0.00128,0.00112,0.00096,0.00088,0.00080,0.00072,0.00064,0.00056,0.00056,0.00048
  Variable3:CoupledWith NONE
  Variable4:ValueList 0.00296,0.00192,0.00136,0.00112,0.00088,0.00072,0.00064,0.00048,0.00048,0.00032,0.00024,0.00024,0.00016,0.00016
  Variable4:CoupledWith 3
  Variable5:ValueList 252,213,233,220,224,229
  Variable5:CoupledWith 1
  Variable6:ValueList 0.875in,1.750in,3.500in,5.250in
  Variable6:CoupledWith 2
  Variable7:ValueList 2, 3, 4, 5, 6, 7, 8, 9,10,12,14,16,18,20
  Variable7:CoupledWith 3
}

```

FIGURE 3. *The GeoDict Macro File defines the values for the parameter study and calls the commands that perform the study in the .gvm file [Figure 2 d)] with these values.*

[inch] as it was used in [1] (Variable 6 or % 6 in the .gvm file). Finally, the width is defined by the pleat count (pleats per inch) as in [1] (Variable 7 or % 7 in the .gvm file), which defines the bottom and the top radius, i.e. radius near the outlet and inlet of the pleat, used in GeoDict (Variable 3 and Variable 4 or % 3 and % 4 in the .gvm file). More details regarding the second block in the .gvm file follow in the next section.

Figure 4 and Figure 5 illustrate a few of the possibilities of the structure generation. For the two-dimensional case in Figure 4, the pleat count and pleat height are varied, as needed to reproduce [1]. The media thickness in this example is 38 micron and the grid resolution 8 micron. This resolution means that effectively a 40 micron media will be computed. Note that using a smaller resolution such as 2 micron (which is needed to properly resolve 38 micron) would result in a 16 times (4 times 4) bigger computational problem. In 3 dimensions, this effect of grid refinement is even worse: a 4 times smaller mesh size results in a 64 times bigger computational setup. It is one of the points of this study to show that such precision is not necessary in some cases. Industrially relevant results such as the pressure drop automation by simulation can be achieved in acceptable simulation times, such as 24 hours in this case. The higher resolution computations are of course also automatically doable, but should be restricted to particularly interesting cases, and not be used for a 3-dimensional parameter study.

Such individual cases are considered in the case of the supporting structures. Here, a 3-dimensional computational domain must be considered because the support structures add a variation in the depth-direction of the pleat. Figure 5 a) shows only the support structure. For this netting, the inner and outer wires are shown for better comprehension in green and blue, with slight color differences where they overlap. For the flow, these solid wires are obstacles. In Figure 5 b), in addition to the netting also the filter media is shown. The red cells are porous, or permeable cells, i.e. the gas or liquid flows through these cells. In the case of a single layered media, the permeability of the red cells is set to that of the filter media. For layered materials, the permeability of each individual layer must be known and specified.

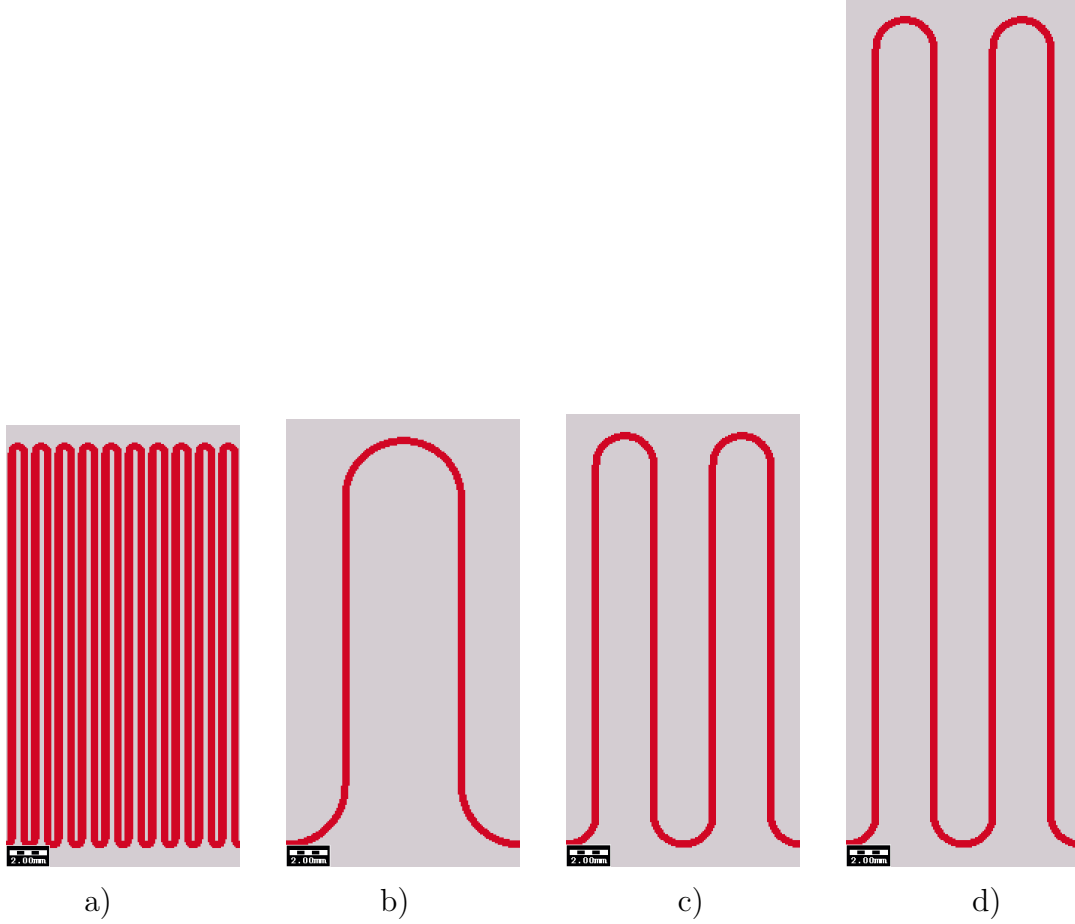


FIGURE 4. *Illustration of pleat count and pleat height. a) Height 0.875 inch (22 mm), pleat count 20/in. b) Height 0.875 inch (22 mm), pleat count 2/in. c) Height 0.875 inch (22 mm), pleat count 4/in. d) Height 1.75 inch (44 mm), pleat count 4/in.*

3. COMPUTATION OF THE PRESSURE DROP

3.1. Notation. Without loss of generality, the repetitive unit is a rectangular domain $\Omega = [0, l_x] \times [0, l_y] \times [0, l_z]$. The width of the pleat l_x corresponds directly to the pleat count. For example, if the pleat count is n pleats per inch, then the width is $25.4/n$ mm, since $1 \text{ in} = 25.4 \text{ mm}$ holds. The height of the pleat together with the length of the inflow and outflow regions is denoted by l_z . The depth of the pleat is denoted by l_y . For two-dimensional computations, $l_y = 0$. Because we use a uniform Cartesian grid, we assume that $l_x = n_x h$, $l_y = n_y h$ and $l_z = n_z h$, i.e. that the computational domain Ω is made up of $n_x \times n_y \times n_z$ cubic cells of volume h^3 .

The volume occupied by the solid cells that result from a support structure is denoted by G . For example, the green and blue cells in Figure 5 are solid cells.

In the depth and width direction, periodic boundary conditions for the velocity and pressure are used because we compute exactly on a repetitive unit. This gives

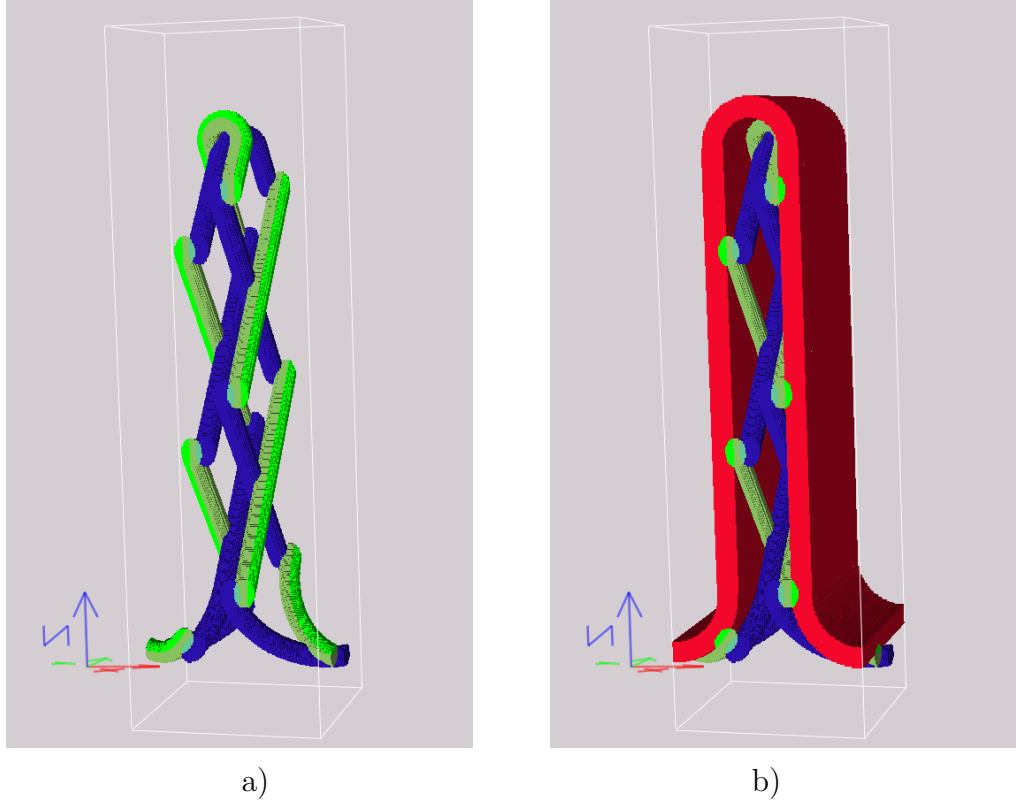


FIGURE 5. *Three-dimensional example of a pleat with a supporting netting. a) Only support netting. Inner and outer wire shown in blue and green, respectively. b) Netting and media. The resolution, or voxel size, should be chosen so that the thickness of the media (shown in red) is at least 5 cells.*

a computational domain that is twice the size in a direction than the more usual symmetry boundary conditions as used for example in [1]. In the height direction, we also use periodic boundary conditions for pressure and velocity. This is not very common but has been done successfully by our group for many years. Some discussion comparing periodic boundary conditions with pressure inlet and outflow conditions in the flow direction will follow in §4.

We assume an incompressible, creeping and stationary flow of a Newtonian liquid such as air or oil. In the Eulerian formulation as stationary Stokes-Brinkmann equations, four variable fields and one constant field describe the flow. The variable fields are the velocity and pressure, the constant field is the permeability. The velocity field $\mathbf{u} = (u, v, w)$ consists of three components indicating the contributions in the x , y and z direction, respectively. The pressure field is denoted by p .

The last field K is the permeability. We assume that all layers of the media are isotropic and extend the permeability also into the free flow regime by infinity for ease of exposition below. Following Iliev and Laptev [5], for this choice K^{-1} becomes 0 in the free flow which reduces the Stokes-Brinkmann to the Stokes equations.

$$K = \begin{cases} \begin{bmatrix} \infty & 0 & 0 \\ 0 & \infty & 0 \\ 0 & 0 & \infty \end{bmatrix} & \text{in empty cells} \\ \begin{bmatrix} \kappa_c & 0 & 0 \\ 0 & \kappa_c & 0 \\ 0 & 0 & \kappa_c \end{bmatrix} & \text{in cells of color } c, \end{cases}$$

This permeability tensor formulation is capable of handling anisotropic media in the future. The tensor would be diagonal in the directions of the media and undergo a coordinate transformation depending on the position of the media in the pleat. For example, the red cells in Figure 5 b) are permeable cells.

3.2. Equations. The pressure drop for a given mass flux or equivalently, given average velocity, is computed indirectly. The equations describe a setup with a defined pressure drop and the solution is then linearly scaled to reflect the desired mean velocity.

Given the pressure drop ΔP in the height direction of the pleat, we recall that the pleat height is denoted by l_z . That means that the average slope of the pressure d is given by

$$d = \frac{\Delta P}{l_z}.$$

Thus, if the true pressure is denote by P the computational pressure $p = P - dz$ is a perturbation around a constant. So even though \mathbf{u} and p are periodic, P has the pressure drop ΔP . For a given pressure drop, the velocity \mathbf{u} and the pressure p are then governed by the stationary Stokes-Brinkmann equations with periodic boundary conditions. Recall that under the assumption of stationarity, all time-derivatives vanish.

$$-\mu\Delta\mathbf{u} + \nabla(p + dz) + K^{-1}\mathbf{u} = 0 \text{ in } \Omega \setminus G, \quad (1)$$

$$\nabla \cdot \mathbf{u} = 0 \text{ in } \Omega \setminus G, \quad (2)$$


$$\mathbf{u}(x + il_x, y + jl_y, z + kl_z) = \mathbf{u}(x, y, z) \text{ for } i, j, k \in \mathbf{Z} \quad (3)$$

$$p(x + il_x, y + jl_y, z + kl_z) = p(x, y, z) \text{ for } i, j, k \in \mathbf{Z} \quad (4)$$

$$\mathbf{u} = 0 \text{ on } \partial G$$

Experimentalists usually prescribe the mean velocity or mass flux instead of the pressure drop. This setup is handled easily by using the linearity of the Stokes-Brinkmann equations. Once the velocity and pressure for a given pressure drop ΔP_1 have been found by solving the equations (1)-(4), one computes the average velocity in z-direction, \bar{w}_1 . Then the pressure drop for the physical mean velocity \bar{w} is $\Delta P = \frac{\bar{w}}{\bar{w}_1} \Delta P_1$.

3.3. Discretization. We consider the staggered grid or MAC-grid by Harlow and Welch [4] on a uniform Cartesian grid with mesh size h . On this grid, the velocity variables \mathbf{u} and pressure variable p are thought to have meaning in geometrically different positions of the cell.

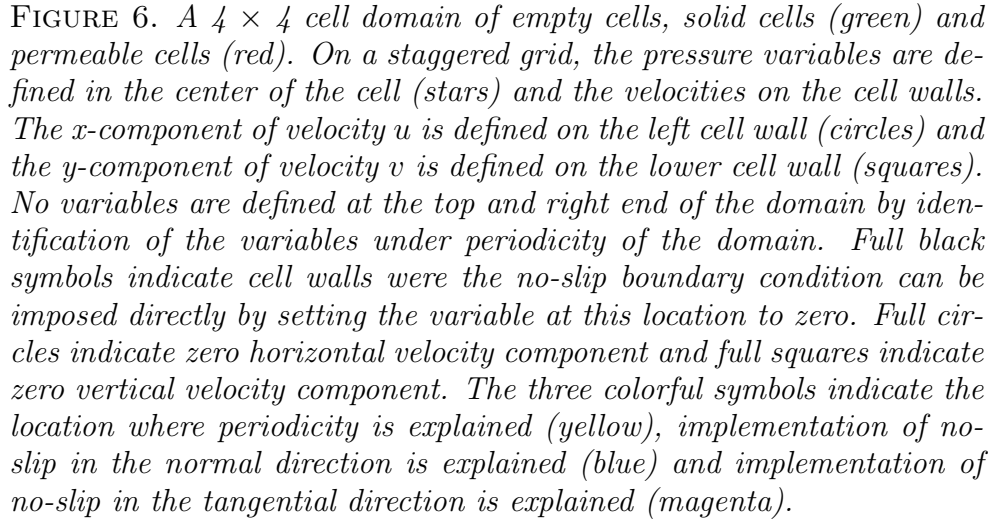

3.3.1. *The staggered grid.* Cell centers are located at $\{0.5h, 1.5h, \dots, (n_x - 0.5)h\} \times \{0.5h, 1.5h, \dots, (n_y - 0.5)h\} \times \{0.5h, 1.5h, \dots, (n_z - 0.5)h\}$, and the variables have the following meaning: for $i = 1, 2, \dots, n_x$, $j = 1, 2, \dots, n_y$ and $k = 1, 2, \dots, n_z$:

| | | |
|-------------|-------------------------------|--|
| $P_{i,j,k}$ | is pressure at | $((i - 0.5)h, (j - 0.5)h, (k - 0.5)h)$, |
| $U_{i,j,k}$ | is x-component of velocity at | $((i - 1.0)h, (j - 0.5)h, (k - 0.5)h)$, |
| $V_{i,j,k}$ | is y-component of velocity at | $((i - 0.5)h, (j - 1.0)h, (k - 0.5)h)$, |
| $W_{i,j,k}$ | is z-component of velocity at | $((i - 0.5)h, (j - 0.5)h, (k - 1.0)h)$. |

Figure 6 illustrates the staggered grid and the meaning of the variables.

3.3.2. *Centered, forward and backward differences.* For the staggered grid, the discretization of the Laplace, gradient and divergence operators become particularly simple and satisfy the well known inf-sup conditions naturally. For the gradient operator, a backward difference is used, i.e. the pressure gradient reads

$$\nabla p = \left(\frac{P_i - P_{i-1}}{h}, \frac{P_j - P_{j-1}}{h}, \frac{P_k - P_{k-1}}{h} \right)^T.$$

One may think of the components as being meaningful on the respective cell wall, where the u , v and w variables live. The divergence of the velocity field is discretized by

$$\nabla \cdot \mathbf{u} = \frac{U_{i+1} - U_i + V_{j+1} - V_j + W_{k+1} - W_k}{h}.$$

One may think of each of the three differences as being meaningful in the cell center, where the p variable lives, and due to this collocation it is reasonable to add them up. Finally, with these differences, $-\Delta = -\nabla \cdot \nabla$ holds for the discrete Laplacian. More details can be found for example in [10].

Permeable cells were not used in [4], so we follow [5]: Since permeability multiplies a velocity, the two permeability values from the neighboring cells must be aggregated. We use the harmonic average

$$\kappa = \left(\frac{\kappa_1^{-1} + \kappa_2^{-1}}{2} \right)^{-1}.$$

The formula also expresses the computation of the permeability across the interface between permeable and empty cells, if one interprets $\infty^{-1} = 0$ and $0^{-1} = \infty$.

3.3.3. *The standard formulas.* We combine the equations above and for ease of notation give the details for 2 space dimensions only. The third dimension behaves just like the tangential direction in 2 space dimensions. The directions are x and z due to our convention that the pleat depth occurs in the y -direction.

For any permeable or empty cell whose 4 face neighbors are also porous or empty, the 4 equations for the 4 variables related to this cell are

$$-\mu \frac{U_{i-1,k} + U_{i,k-1} - 4U_{i,k} + U_{i+1,k} + U_{i,k+1}}{h^2} + \frac{P_{i,k} - P_{i-1,k}}{h} + \left(\frac{\kappa_{i-1,k}^{-1} + \kappa_{i,k}^{-1}}{2} \right)^{-1} U_{i,k} = 0 \quad (5)$$

$$-\mu \frac{W_{i-1,k} + W_{i,k-1} - 4W_{i,k} + W_{i+1,k} + W_{i,k+1}}{h^2} + \frac{P_{i,k} - P_{i,k-1}}{h} + \left(\frac{\kappa_{i,k-1}^{-1} + \kappa_{i,k}^{-1}}{2} \right)^{-1} W_{i,k} = -d \quad (6)$$

$$\frac{U_{i+1,k} - U_{i,k}}{h} + \frac{W_{i,k+1} - W_{i,k}}{h} = 0 \quad (7)$$

Note that the given pressure drop results in the right hand side forcing term $-d$.

3.3.4. *Periodic boundary conditions.* In the staggered grid setting, a periodic boundary condition may be thought of as no boundary condition at all. Pairs of opposite sides of the domain are identified and this is reflected in the variables. We illustrate periodicity

at the location with the yellow circle in Figure 6. Using that $U_{0,4}$ is identified with $U_{4,4}$, $U_{1,5}$ is identified with $U_{1,1}$ and $P_{0,4}$ is identified with $P_{4,4}$, we have

$$\begin{aligned} -\mu \frac{U_{0,4} + U_{1,3} - 4U_{1,4} + U_{2,4} + U_{1,5}}{h^2} + \frac{P_{1,4} - P_{0,4}}{h} &= \\ -\mu \frac{U_{4,4} + U_{1,3} - 4U_{1,4} + U_{2,4} + U_{1,1}}{h^2} + \frac{P_{1,4} - P_{4,4}}{h} &= 0 \end{aligned}$$

3.3.5. No-slip boundary condition in the normal direction. The no-slip boundary condition specifies that the velocity is zero on the boundary. In the normal direction, this means that no material transport can occur from the fluid into the solid. This boundary condition occurs in the locations with solid black symbols in Figure 6. We illustrate how no-slip in the normal direction influences the formulas for the neighboring cells by considering (5) at the location that is marked by the blue circle in Figure 6. Using $U_{3,3} = 0$, yields

$$\begin{aligned} -\mu \frac{U_{1,3} + U_{2,2} - 4U_{2,3} + U_{3,3} + U_{2,4}}{h^2} + \frac{P_{2,3} - P_{1,3}}{h} &= \\ -\mu \frac{U_{1,3} + U_{2,2} - 4U_{2,3} + U_{2,4}}{h^2} + \frac{P_{3,3} - P_{2,3}}{h} &= 0. \end{aligned}$$

Also, the divergence is influenced for the cell right of the blue circle. Using $U_{3,3} = 0$, (7) becomes

$$\frac{U_{3,3} - U_{2,3}}{h} + \frac{W_{2,4} - W_{2,3}}{h} = \frac{-U_{2,3}}{h} + \frac{W_{2,4} - W_{2,3}}{h} = 0$$

3.3.6. No-slip boundary condition in the tangential direction. In the tangential direction, the zero-velocity condition cannot be implemented by simply setting a variable to zero. Instead, a mirror condition is used, which was already mentioned in [4] and probably much older. We illustrate how no-slip in the tangential direction influences the formulas for the neighboring cells by considering (6) at the location that is marked by the magenta square in Figure 6. Using $W_{3,3} = -W_{2,3}$, we obtain

$$\begin{aligned} -\mu \frac{W_{1,3} + W_{2,2} - 4W_{2,3} + W_{3,3} + W_{2,4}}{h^2} + \frac{P_{2,3} - P_{2,2}}{h} &= \\ -\mu \frac{W_{1,3} + W_{2,2} - 5W_{2,3} + W_{2,4}}{h^2} + \frac{P_{3,3} - P_{2,3}}{h} &= -d. \end{aligned}$$

3.4. Solution. Following Cheng and Wiegmann [2], the Semi-Implicit Method for Pressure-Linked Equation (SIMPLE) Algorithm by Patankar and Spalding [6] is adopted. SIMPLE is essentially a guess-and-correct procedure for the calculation of pressure and velocities on the staggered grid shown in Figure 6. An initial pressure field P^* is guessed to initialize the calculation. The velocities are then solved from the discretised momentum equations (5) and (6).

$$a_{i,k}^U U_{i,k}^* = \Sigma a_{nb}^U U_{nb}^* + (P_{i-1,k}^* - P_{i,k}^*) A_{i,k}^U + b_{i,k}^U \quad (8)$$

$$a_{i,k}^W W_{i,k}^* = \Sigma a_{nb}^W W_{nb}^* + (P_{i,k-1}^* - P_{i,k}^*) A_{i,k}^W + b_{i,k}^W, \quad (9)$$

Here the notation nb means "neighbor" cells. If we define the pressure and velocities decomposed into a guessed and corrected value,

$$\begin{aligned} P &= P^* + P' \\ U &= U^* + U' \\ V &= W^* + W', \end{aligned}$$

we obtain, by subtracting the equations (8) and (9) from the re-written equations (5) and (6):

$$a_{i,k}^U U'_{i,k} = \Sigma a_{nb}^U U'_{nb} + (P'_{i-1,k} - P'_{i,k}) A_{i,k}^U \quad (10)$$

$$a_{i,k}^W W'_{i,k} = \Sigma a_{nb}^W W'_{nb} + (P'_{i,k-1} - P'_{i,k}) A_{i,k}^W. \quad (11)$$

In the SIMPLE algorithm, $\Sigma a_{nb}^u U'_{nb}$ and $\Sigma a_{nb}^v W'_{nb}$ are dropped. This does not affect the final solution because the pressure correction and velocity corrections will all be zero in a converged solution. Therefore, we obtain

$$U'_{i,k} = (P'_{i-1,k} - P'_{i,k}) \frac{A_{i,k}^U}{a_{i,k}^U} \quad (12)$$

$$W'_{i,k} = (P'_{i,k-1} - P'_{i,k}) \frac{A_{i,k}^W}{a_{i,k}^W}. \quad (13)$$

The correct velocities become

$$U_{i,k} = U_{i,k}^* + (P'_{i-1,k} - P'_{i,k}) \frac{A_{i,k}^U}{a_{i,k}^U} \quad (14)$$

$$W_{i,k} = W_{i,k}^* + (P'_{i,k-1} - P'_{i,k}) \frac{A_{i,k}^W}{a_{i,k}^W}, \quad (15)$$

and similarly,

$$U_{i+1,k} = U_{i+1,k}^* + (P'_{i,k} - P'_{i+1,k}) \frac{A_{i+1,k}^U}{a_{i+1,k}^U} \quad (16)$$

$$W_{i,k+1} = W_{i,k+1}^* + (P'_{i,k} - P'_{i,k+1}) \frac{A_{i,k+1}^W}{a_{i,k+1}^W}. \quad (17)$$

Substituting equations (14) - (17) into the continuity equation (7), the pressure-correction equation is found as follows:

$$a_{i,k}^P P'_{i,k} = a_{i+1,k}^P P'_{i+1,k} + a_{i-1,k}^P P'_{i-1,k} + a_{i,k+1}^P P'_{i,k+1} + a_{i,k-1}^P P'_{i,k-1} + b_{i,k}^P, \quad (18)$$

where

$$\begin{aligned} b_{i,k}^P &= U'_{i+1,k} - U'_{i,k} + W'_{i,k+1} - W'_{i,k}, \\ a_{i,k}^P &= a_{i+1,k}^P + a_{i-1,k}^P + a_{i,k+1}^P + a_{i,k-1}^P. \end{aligned}$$

Once the pressure correction is known, velocity corrections can be obtained with equations (10) and (11), and the correct pressure and velocity fields are obtained.

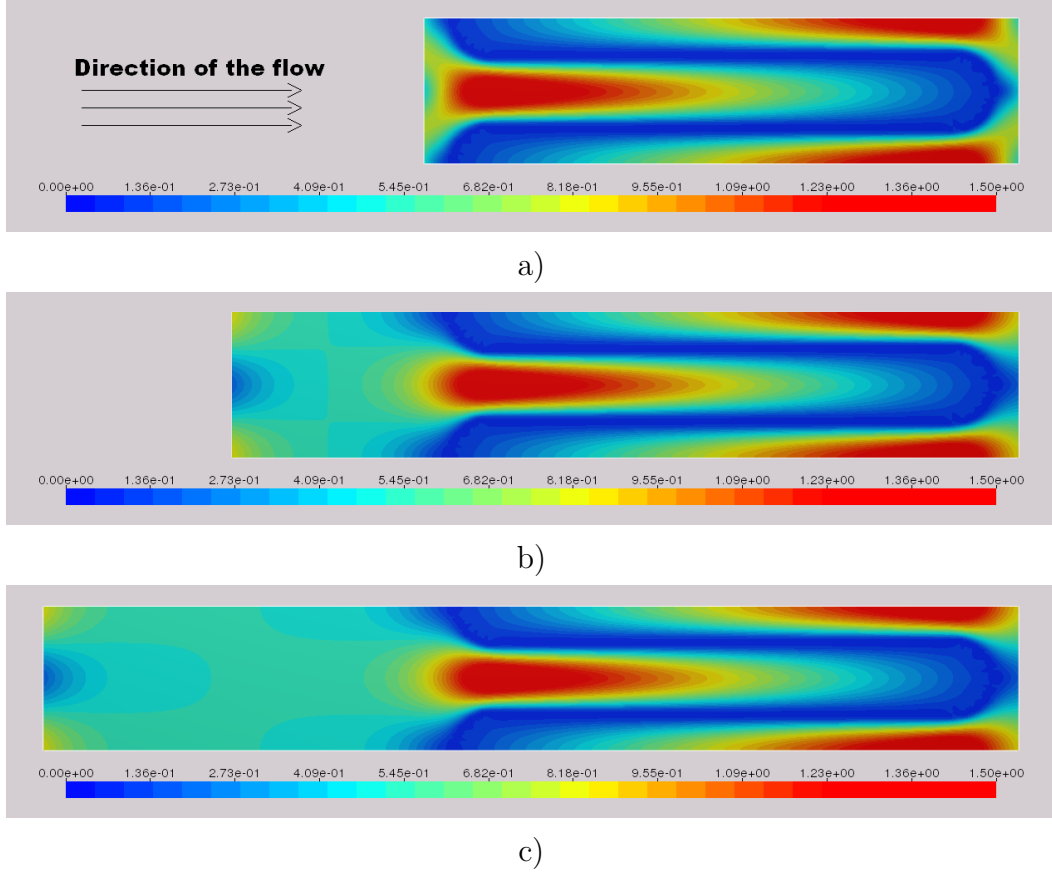


FIGURE 7. a) *Magnitude of velocity [m/s] for media 213, pleat height 0.875 in and pleat count 4.* b) *Same as a) with additional inlet of ca. 8 mm.* c) *Same as a) with additional inlet of ca. 16 mm.*

Because of the simplification from equations (10) and (11) to (12) and (13), it is possible to obtain a large pressure correction based on a poorly guessed pressure field. Under-relaxation is hence used during the iterative process.

4. RESULTS

4.1. Pleated air filter without supporting mesh. Chen et al.[1] presented a numerical model to optimize the design of pleated filter panels. They consider air flow through 6 filter media with permeabilities listed in Table 1. For each media they consider 4 different pleat heights of 0.0875 inch, 1.75 inch, 3.5 inch and 5.25 inch and vary the pleat count for each of these 24 combinations from 2 pleats per inch to 20 pleats per inch.

Figure 4 gives an illustration about the difference in pleat count from 20 to 2 and the variation in height. The highest pleat under consideration is three times as high as the one shown in Figure 4d).

We reproduce the results from [1] in spite of several technical differences. Their finite element approach is replaced by a finite volume approach. We use periodic boundary

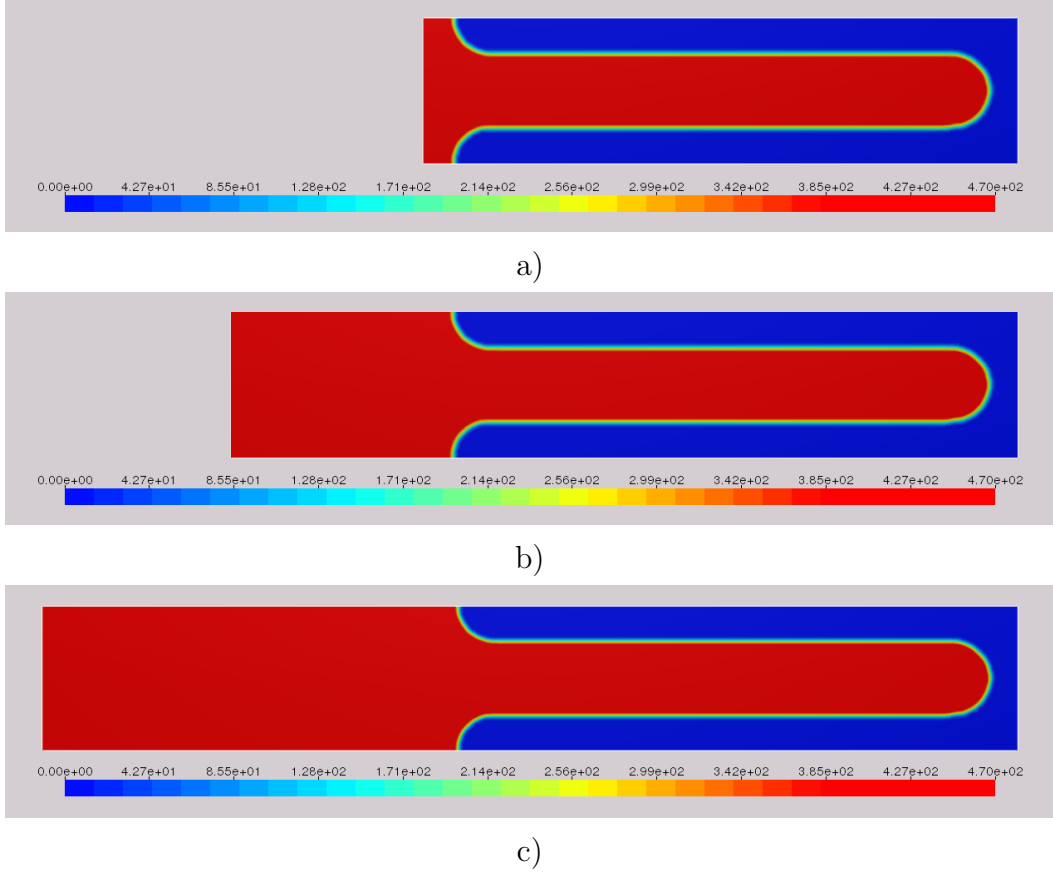


FIGURE 8. a) Pressure [Pa] for media 213, pleat height 0.875 in and pleat count 4. b) Same as a) with additional inlet of ca. 8 mm. c) Same as a) with additional inlet of ca. 16 mm.

| Grade no. | DOP Efficiency | Permeability $\kappa[m^2]$ | Thickness | Base weight $[g/m^2]$ |
|-----------|----------------|----------------------------|-----------|-----------------------|
| 252 | 99.99 % ULPA | 7.25e-13 | 0.38 | 73 |
| 213 | 99.985% HEPA | 1.03e-12 | 0.38 | 73 |
| 233 | 98.5 % | 2.26e-12 | 0.38 | 73 |
| 220 | 95 % | 3.20e-12 | 0.38 | 73 |
| 224 | 90-95 % ASHRAE | 7.68e-12 | 0.38 | 73 |
| 229 | 80-90 % ASHRAE | 1.10e-07 | 0.38 | 73 |

TABLE 1. Permeabilities of 6 filter media considered in [1].

conditions and much shorter inlets and outlets. Periodicity in the lateral direction leads to computations on a complete pleat rather than a symmetry cell as in [1] which is half a pleat. More importantly, periodic boundary conditions in the flow direction are used, which do not explicitly impose a constant velocity on any line perpendicular to the flow as it is present in [1]. This may be the reason why we may work with a much shorter inlet. Finally, here the pleat ends are rounded rather than square as in [1].

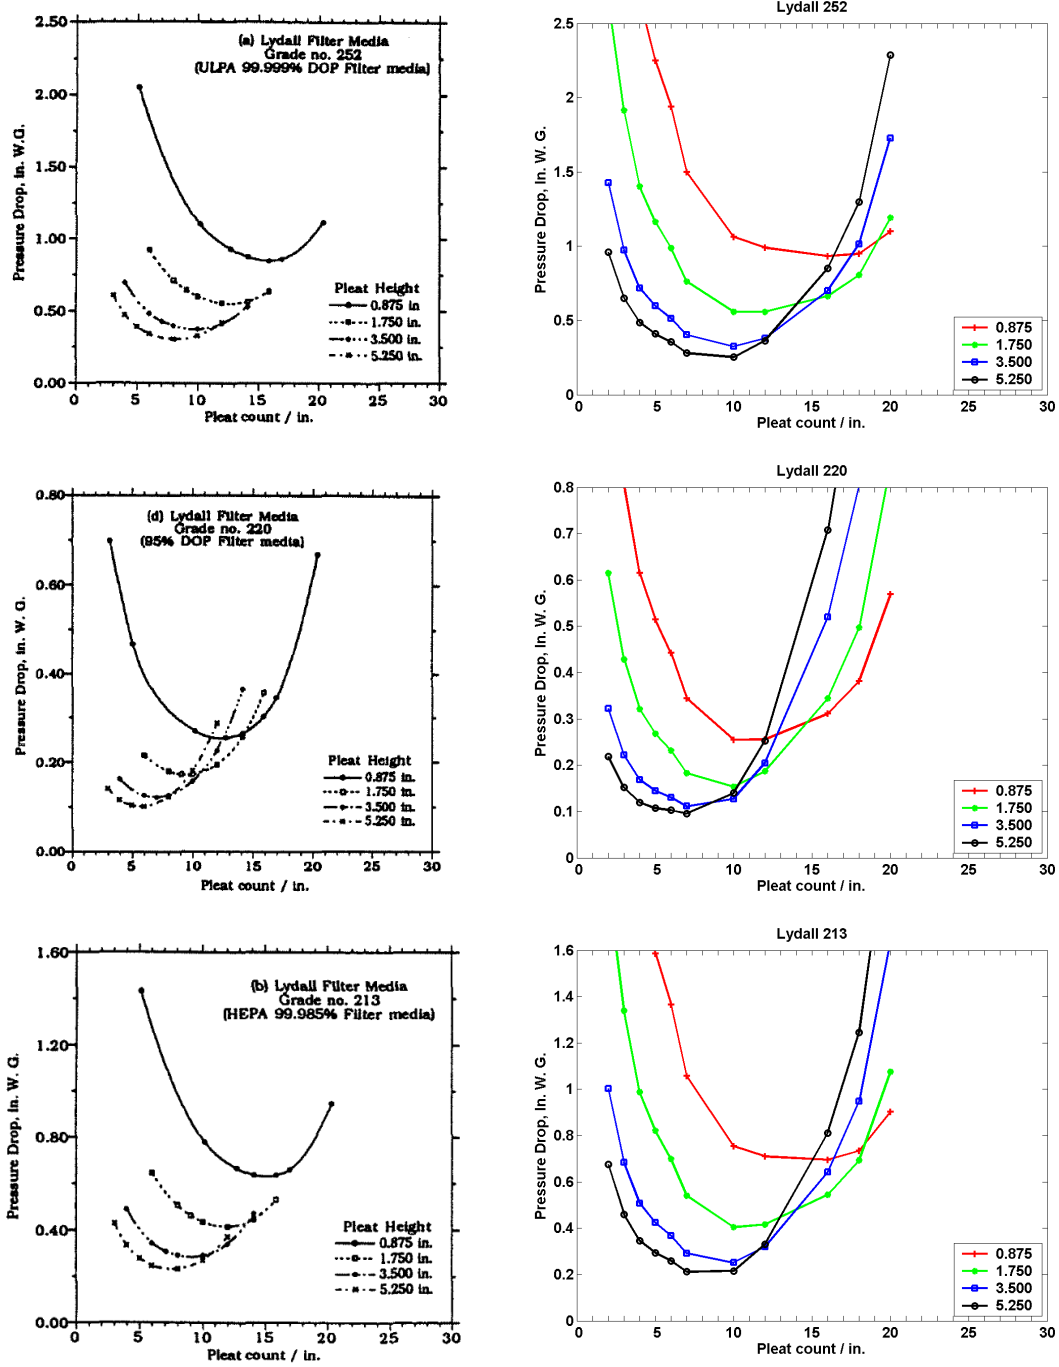


FIGURE 9. Initial pressure drop as a function of pleat count and pleat height for 3 filter media at approaching velocity 100 fpm from [1] (left) and computed with GeoDict (right).

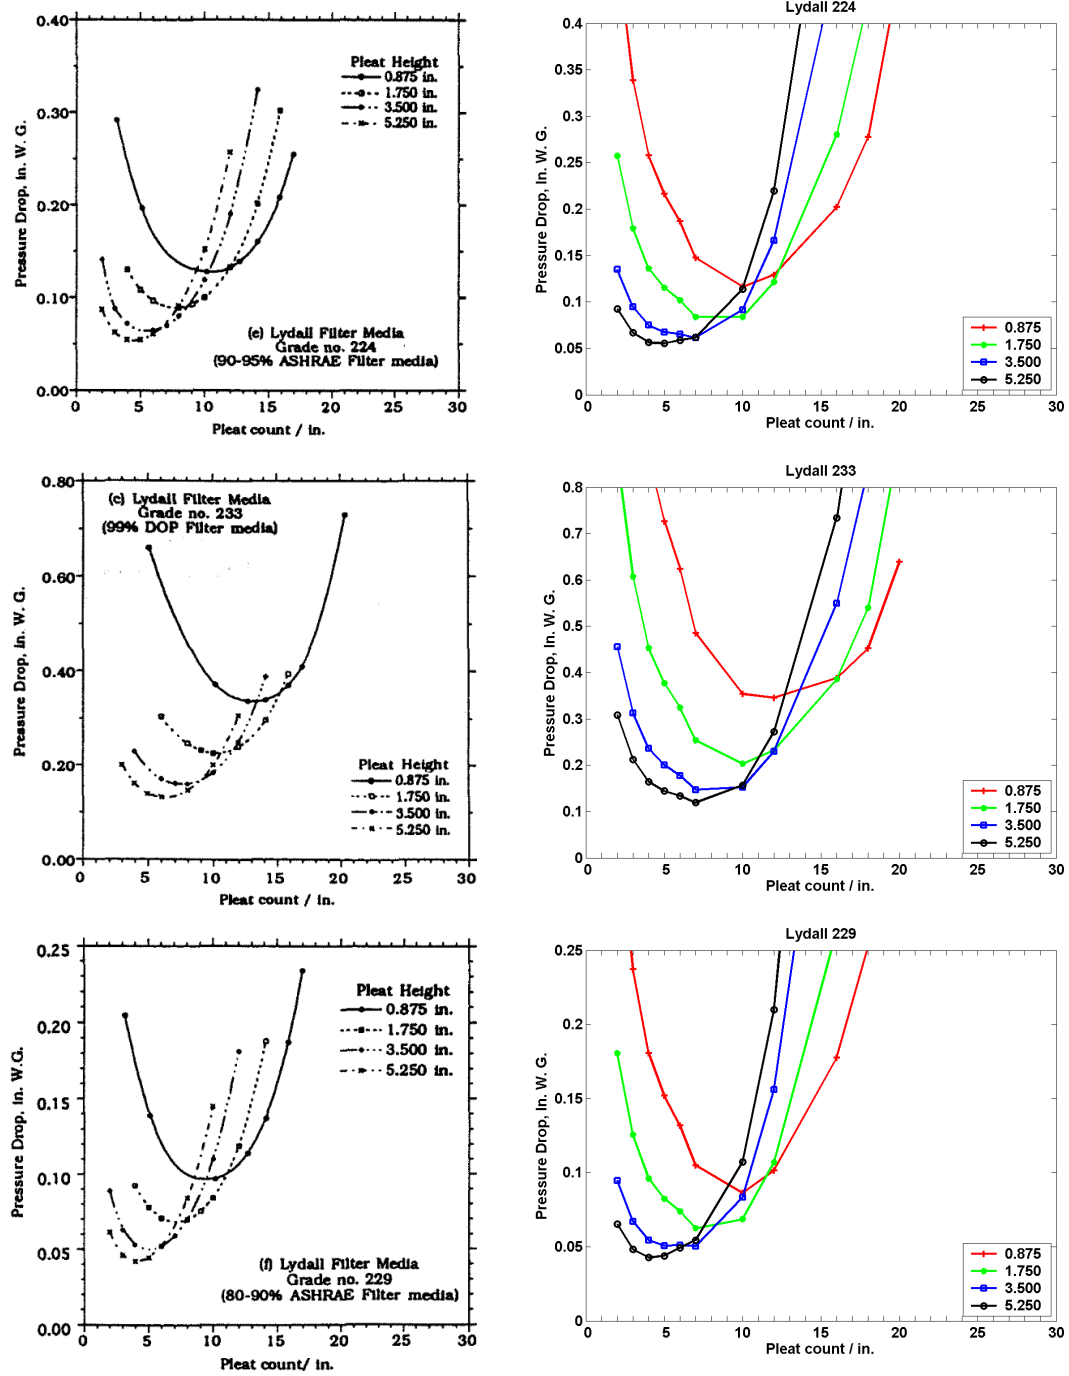


FIGURE 10. Initial pressure drop as a function of pleat count and pleat height for 3 filter media at approaching velocity 100 fpm from [1] (left) and computed with GeoDict (right).

| Inlet length [mm] | $\Delta P [Pa]$ |
|-------------------|-----------------|
| 1 | 470.6 |
| 9 | 473.0 |
| 17 | 473.6 |

TABLE 2. Pressure drop for varying inlet, media 213, height 0.875 inch, velocity 100 fpm.

From previous experience, the resolution was chosen at 80 micron so that the thickness of the media is about 5 grid cells. This means that we effectively compute for a 40 micron media and not a 38 micron media, because the long vertical parts of the media are 5 cells wide.

In order to minimize the computation time, we first studied the influence of the length of the inlet on the computed pressure drop. Figure 7 a) — c) show the magnitude of the velocity for inlets of 1, 9 and 17 mm, respectively. For the shortest inlet the flow field is strongly influenced by the periodic boundary condition in the direction of the flow. For the longer two inlets in Figure 7 b) and c) the velocity distribution within the pleat is the same.

However, the predicted pressure drop hardly varies for the three cases, see Figure 8. The precise values for the pressure drop for the 3 different inlets is given in Table 2.

We convert our results from Pascal to inch of water gauge as used in [1] via $1 [In.W.G.] = 249.08 [Pa]$ and perform the same study as [1]. As dynamic viscosity we use $1.84e - 5 [kg/(ms)]$, the density is $1.02 [kg/m^3]$ and the flow velocity is $100 [fpm] = 0.508 [m/s]$. The striking agreement of the results is immanent from Figure 9 and Figure 10. In particular, the same pleat parameters are found to be optimal, i.e. to have the lowest pressure drop, as in [1].

4.2. Cartridge oil filter with a support structure in the outflow channel. As second example, we consider cartridge oil filters. This means that in reality the pleats are not parallel as in the previous case, but are more open in the inflow region than in the outflow region. Another difference is that for the pressures occurring in this regime, a support structure is required that keeps the outflow channels of the pleat open. The support structure thus has a mechanical function that is not modeled, and influences the pressure by obstructing the flow in the outflow channel and effectively reducing the available surface area of the filter media. Different from the previous example, models including support structures must be fully three-dimensional. Figure 11 shows a scanning electron image of a standard supporting media from Delstar and a computer model of the pleated netting.

| Pleat shape | $\Delta P [Pa]$ |
|---|-----------------|
| Wide outflow channel with thick wire, Figure 12 a) and Figure 13 a) | 307000 |
| Wide outflow channel with thin wire, Figure 12 b) and Figure 13 b) | 275000 |
| Narrow outflow channel, Figure 12 c) and Figure 13 c) | 405000 |

TABLE 3. Pressure drop depending on the width of the outflow channel and the wire thickness.

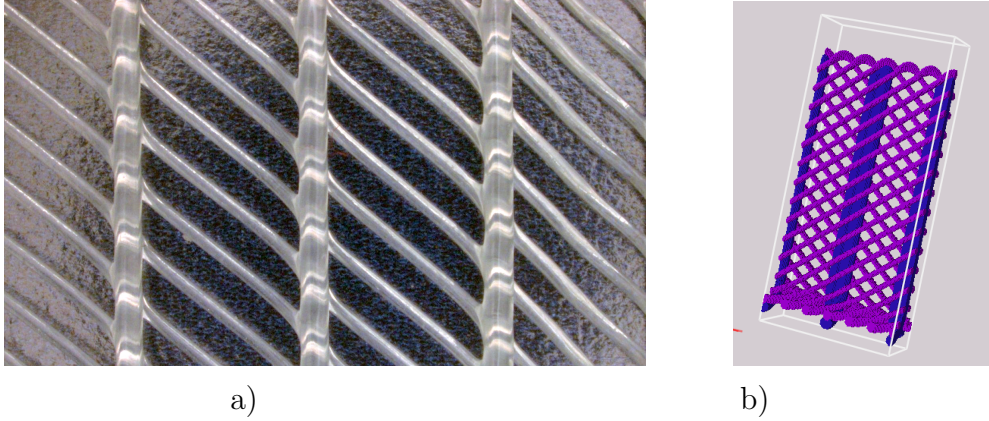


FIGURE 11. *SEM image of a Delstar netting and computer model of a similar pleated netting.*

Computations of oil flow through such structures have been done by our group for many years. Unfortunately, we were not permitted to show the agreement of experimental data with our simulations both for the SuFiS solver [5] and the Parpac solver [11]. However, we can compare results from the new Explicit Finite Volume Stokes solver (EFV) [2] with those for the well-established SuFiS solver [5]. Due to symmetry conditions in the depth direction, SuFiS generally computes a pressure drop that is about 2-3% higher than the new solver. Symmetry boundary conditions can be imposed in EFV by computing the pressure drop on a domain that is twice the size of the original one, which is created by reflecting the pleat in the depth direction. For symmetry boundary conditions, the results for SuFiS and EFV differ only by about 0.5%.

We consider three pleats. Two have the same outflow channel width of $720\ [\mu m]$ and one has an outflow channel of width $400\ [\mu m]$. Between the first two pleats, the thickness of the ellipsoid-shaped wires is varied. The mean flow velocity is $0.150\ [m/s]$, the oil density is $850\ [kg/m^3]$ and the oil viscosity is $0.172\ [kg/(ms)]$.

In Figure 12 and Figure 13, the flow direction is from right to left. In Figure 12, the magnitude of the flow velocity is depicted. The highest velocity occurs near the end of the outflow channel and near the end of the inflow channel. This is due to the fact that much oil is transported through these areas that diffuses from the inflow channel to the outflow channel along the length of the pleat. A good design of the support structure should lead to almost the same pressure drop as if this structure is not present. For the thicker wires in Figure 12 a) and the narrow channel in Figure 12 c), this criteria is violated: higher velocities at the end of the outflow channel than at the beginning of the inflow channel indicate an imbalance in the design.

In Figure 13, the distribution of the pressure is depicted. It illustrates why the pressure drop is 10% higher for the wide channel with thick wires and more than 30% higher than for the wide channel with thin wires. In both, Figure 13 a) and even more so in Figure 13 c), there is a significant variation in the pressure in the outflow channel. In the design in Figure 13 b), the pressure is close to constant in the outflow channel.

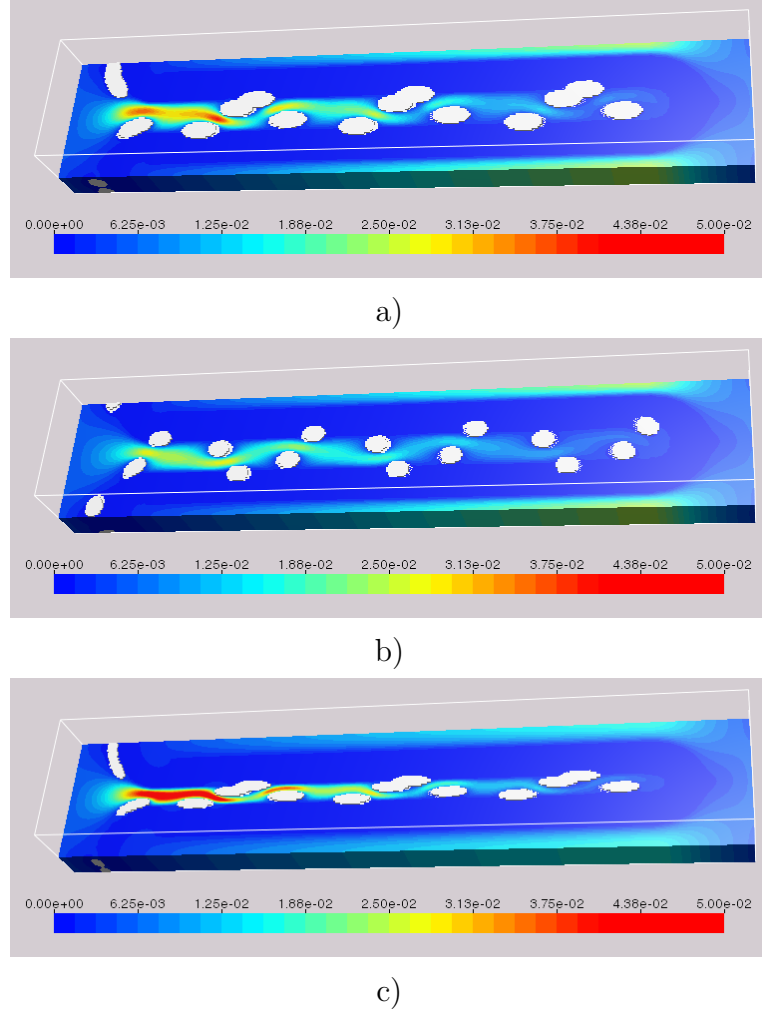


FIGURE 12. *a) Velocity for 720 μm channel with wide wires. b) Velocity for 720 μm channel with narrow wires. c) Velocity for 400 μm channel. The highest velocities occur near the end of the outflow channel, where all the oil that has flown from the inflow channel into the outflow channel along the pleat length must pass through. Flow is from right to left.*

Thus, in Figure 13 a) and c) there is an additional pressure drop due to the channel and support structure design on top of the pressure drop due to the filter media.

The lowest pressure drop occurs without support structure. But in this case the pleat would collapse and the outflow channel width would be zero. To successfully perform pleat design by computer simulations, the operator must also consider the elastic deformation of the filter media in interaction with the support structure. This is the subject of further study.

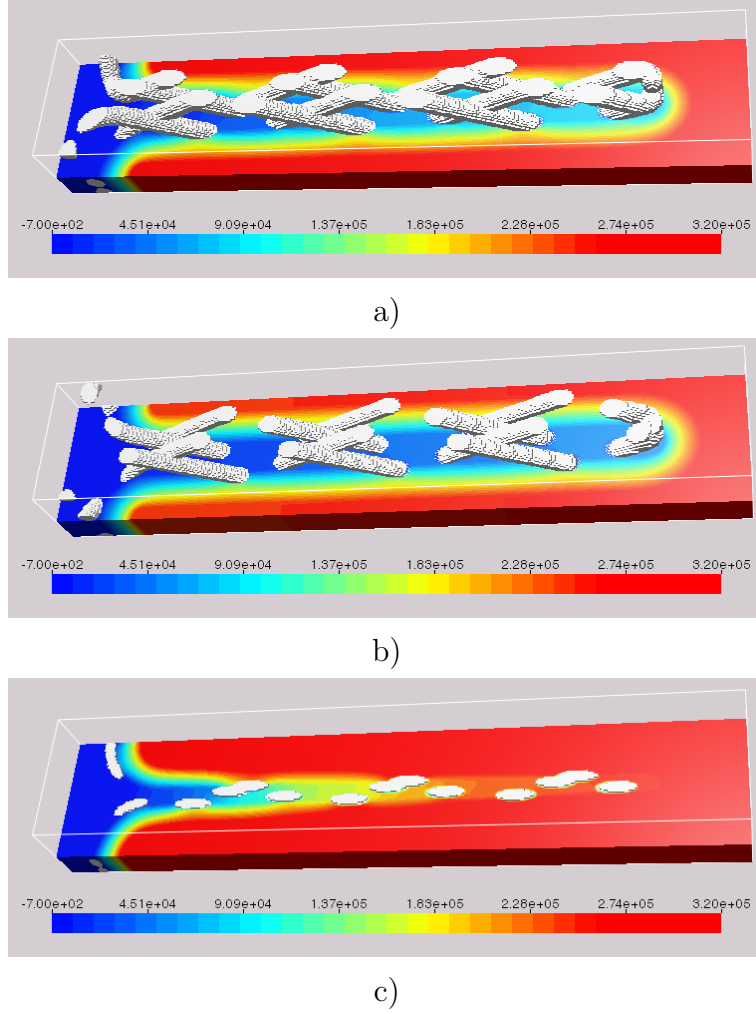


FIGURE 13. *a) Pressure for 720 μm channel with wide wires. b) Pressure for 720 μm channel with narrow wires. c) Pressure for 400 μm channel. The color scheme is the same for all three structures. Note the significant pressure change along the narrow outflow channel in c). Flow is from right to left.*

5. CONCLUSIONS

Pressure drop computations for optimizing simple pleated filter designs from [1] can be reproduced rapidly and automatically by two-dimensional simulations on a uniform Cartesian staggered grid using the SIMPLE method for the Stokes-Brinkmann formulation in the PleatDict module of the GeoDict software. The complete study of $6 \times 4 \times 14$ simulations takes about 24 hours of computer time on a 3.1 GHz dual quad core desktop PC. This speed is possible because the coarsest conceivable grid was used, where the media is resolved by 5 porous cells. Due to the laminar flow regime and periodic boundary conditions, the inlet and outlet regions can be much shorter than used in [1]. The precise pleat shape can be neglected in this regime of long pleats.

The same technology can be used for three-dimensional computations for cartridge oil filters to analyze the influence of the support structure, pleat count, pleat height etc. on the pressure drop. Significant differences can be found for different designs and explained by the details of the velocity and pressure distribution in the pleat. Further work is needed to automatically incorporate the deformation of the filter media under the influence of the oil pressure and support structure.

REFERENCES

- [1] D. Chen, D. Y. H. Pui, and B. Y. H. Liu. Optimization of Pleated Filter Designs Using a Finite-Element Numerical Model. *Aerosol Science and Technology*, 23(4):579—590, 1995.
- [2] L. Cheng and A. Wiegmann. Coupled free flow and porous media flow by EFV-Stokes. In preparation, 2009.
- [3] E. Glatt, S. Rief, A. Wiegmann, M. Knefel, and E. Wegenke. Struktur und Druckverlust realer und virtueller Drahtgewebe. Submitted to *Filtrieren und Separieren*, 2009.
- [4] F. H. Harlow and J. E. Welch. Numerical Calculation of Time-Dependent Viscous Incompressible Flow of Fluid with Free Surface. *The Physics of Fluids*, 8(12):2182—2189, 1965.
- [5] O. Iliev and V. Laptev. On Numerical Simulation of Flow through Oil Filters. *J. Computers and Visualization in Science*, (6):139—146, 2004.
- [6] S. V. Patankar and D. B. Spalding. A calculation procedure for heat mass and momentum transfer in three dimensional parabolic flows. *Int. J. Heat Mass Transfer*, 15:1787—1806, 1972.
- [7] W. R. Ruziwa, N. S. Hanspal, A. N. Waghode, V. Nassehi, and R. J. Wakeman. Computer Modelling of Pleated Cartridge Filters for viscous fluids. *Filtration*, 4(2):136—144, 2004.
- [8] W. R. Ruziwa, N. S. Hanspal, R. J. Wakeman, and V. Nassehi. Hydrodynamic Modelling of Pleated Cartridge Filter Media. In *Filtech 2003 International Conference for Filtration and Separation Technology*, volume I, pages 361—368, October 2003.
- [9] R. J. Wakeman, N. S. Hanspal, A. N. Waghode, and V. Nassehi. Analysis of Pleat Crowding and Medium Compression in Pleated Cartridge Filters. In *Filtech 2005 International Conference for Filtration and Separation Technology*, volume I, pages 116—1123, October 2005.
- [10] A. Wiegmann. Computation of the permeability of porous materials from their microstructure by FFF-Stokes. Technical Report 129, Fraunhofer ITWM Kaiserslautern, 2007.
- [11] A. Wiegmann, S. Rief, and D. Kehrwald. Computational Study of Pressure Drop Dependence on Pleat Shape and Filter Media. In *Filtech 2007 International Conference for Filtration and Separation Technology*, volume I, pages 79—86, October 2007.

Published reports of the Fraunhofer ITWM

The PDF-files of the following reports are available under:

www.itwm.fraunhofer.de/de/zentral__berichte/berichte

1. D. Hietel, K. Steiner, J. Struckmeier
A Finite - Volume Particle Method for Compressible Flows
(19 pages, 1998)
2. M. Feldmann, S. Seibold
Damage Diagnosis of Rotors: Application of Hilbert Transform and Multi-Hypothesis Testing
Keywords: Hilbert transform, damage diagnosis, Kalman filtering, non-linear dynamics
(23 pages, 1998)
3. Y. Ben-Haim, S. Seibold
Robust Reliability of Diagnostic Multi-Hypothesis Algorithms: Application to Rotating Machinery
Keywords: Robust reliability, convex models, Kalman filtering, multi-hypothesis diagnosis, rotating machinery, crack diagnosis
(24 pages, 1998)
4. F.-Th. Lentès, N. Siedow
Three-dimensional Radiative Heat Transfer in Glass Cooling Processes
(23 pages, 1998)
5. A. Klar, R. Wegener
A hierarchy of models for multilane vehicular traffic
Part I: Modeling
(23 pages, 1998)

Part II: Numerical and stochastic investigations
(17 pages, 1998)
6. A. Klar, N. Siedow
Boundary Layers and Domain Decomposition for Radiative Heat Transfer and Diffusion Equations: Applications to Glass Manufacturing Processes
(24 pages, 1998)
7. I. Choquet
Heterogeneous catalysis modelling and numerical simulation in rarified gas flows
Part I: Coverage locally at equilibrium
(24 pages, 1998)
8. J. Ohser, B. Steinbach, C. Lang
Efficient Texture Analysis of Binary Images
(17 pages, 1998)
9. J. Orlik
Homogenization for viscoelasticity of the integral type with aging and shrinkage
(20 pages, 1998)
10. J. Mohring
Helmholtz Resonators with Large Aperture
(21 pages, 1998)
11. H. W. Hamacher, A. Schöbel
On Center Cycles in Grid Graphs
(15 pages, 1998)

12. H. W. Hamacher, K.-H. Küfer
Inverse radiation therapy planning - a multiple objective optimisation approach
(14 pages, 1999)
13. C. Lang, J. Ohser, R. Hilfer
On the Analysis of Spatial Binary Images
(20 pages, 1999)
14. M. Junk
On the Construction of Discrete Equilibrium Distributions for Kinetic Schemes
(24 pages, 1999)
15. M. Junk, S. V. Raghurame Rao
A new discrete velocity method for Navier-Stokes equations
(20 pages, 1999)
16. H. Neunzert
Mathematics as a Key to Key Technologies
(39 pages (4 PDF-Files), 1999)
17. J. Ohser, K. Sandau
Considerations about the Estimation of the Size Distribution in Wicksell's Corpuscle Problem
(18 pages, 1999)
18. E. Carrizosa, H. W. Hamacher, R. Klein, S. Nickel
Solving nonconvex planar location problems by finite dominating sets
Keywords: Continuous Location, Polyhedral Gauges, Finite Dominating Sets, Approximation, Sandwich Algorithm, Greedy Algorithm
(19 pages, 2000)
19. A. Becker
A Review on Image Distortion Measures
Keywords: Distortion measure, human visual system
(26 pages, 2000)
20. H. W. Hamacher, M. Labbé, S. Nickel, T. Sonneborn
Polyhedral Properties of the Uncapacitated Multiple Allocation Hub Location Problem
Keywords: integer programming, hub location, facility location, valid inequalities, facets, branch and cut
(21 pages, 2000)
21. H. W. Hamacher, A. Schöbel
Design of Zone Tariff Systems in Public Transportation
(30 pages, 2001)
22. D. Hietel, M. Junk, R. Keck, D. Teleaga
The Finite-Volume-Particle Method for Conservation Laws
(16 pages, 2001)
23. T. Bender, H. Hennes, J. Kalcsics, M. T. Melo, S. Nickel
Location Software and Interface with GIS and Supply Chain Management
Keywords: facility location, software development, geographical information systems, supply chain management
(48 pages, 2001)
24. H. W. Hamacher, S. A. Tjandra
Mathematical Modelling of Evacuation Problems: A State of Art
(44 pages, 2001)

25. J. Kuhnert, S. Tiwari
Grid free method for solving the Poisson equation
Keywords: Poisson equation, Least squares method, Grid free method
(19 pages, 2001)
26. T. Götz, H. Rave, D. Reinel-Bitzer, K. Steiner, H. Tiemeier
Simulation of the fiber spinning process
Keywords: Melt spinning, fiber model, Lattice Boltzmann, CFD
(19 pages, 2001)
27. A. Zemitis
On interaction of a liquid film with an obstacle
Keywords: impinging jets, liquid film, models, numerical solution, shape
(22 pages, 2001)
28. I. Ginzburg, K. Steiner
Free surface lattice-Boltzmann method to model the filling of expanding cavities by Bingham Fluids
Keywords: Generalized LBE, free-surface phenomena, interface boundary conditions, filling processes, Bingham viscoplastic model, regularized models
(22 pages, 2001)
29. H. Neunzert
»Denn nichts ist für den Menschen als Menschen etwas wert, was er nicht mit Leidenschaft tun kann«
Vortrag anlässlich der Verleihung des Akademiestipendiums des Landes Rheinland-Pfalz am 21.11.2001
Keywords: Lehre, Forschung, angewandte Mathematik, Mehrskalalanalyse, Strömungsmechanik
(18 pages, 2001)
30. J. Kuhnert, S. Tiwari
Finite pointset method based on the projection method for simulations of the incompressible Navier-Stokes equations
Keywords: Incompressible Navier-Stokes equations, Meshfree method, Projection method, Particle scheme, Least squares approximation
AMS subject classification: 76D05, 76M28
(25 pages, 2001)
31. R. Korn, M. Krekel
Optimal Portfolios with Fixed Consumption or Income Streams
Keywords: Portfolio optimisation, stochastic control, HJB equation, discretisation of control problems
(23 pages, 2002)
32. M. Krekel
Optimal portfolios with a loan dependent credit spread
Keywords: Portfolio optimisation, stochastic control, HJB equation, credit spread, log utility, power utility, non-linear wealth dynamics
(25 pages, 2002)
33. J. Ohser, W. Nagel, K. Schladitz
The Euler number of discretized sets – on the choice of adjacency in homogeneous lattices
Keywords: image analysis, Euler number, neighborhood relationships, cuboidal lattice
(32 pages, 2002)
34. I. Ginzburg, K. Steiner
Lattice Boltzmann Model for Free-Surface flow and Its Application to Filling Process in Casting

Keywords: Lattice Boltzmann models; free-surface phenomena; interface boundary conditions; filling processes; injection molding; volume of fluid method; interface boundary conditions; advection-schemes; up-wind-schemes
(54 pages, 2002)

35. M. Günther, A. Klar, T. Materne, R. Wegener

Multivalued fundamental diagrams and stop and go waves for continuum traffic equations

Keywords: traffic flow, macroscopic equations, kinetic derivation, multivalued fundamental diagram, stop and go waves, phase transitions
(25 pages, 2002)

36. S. Feldmann, P. Lang, D. Prätzel-Wolters
Parameter influence on the zeros of network determinants

Keywords: Networks, Equicofactor matrix polynomials, Realization theory, Matrix perturbation theory
(30 pages, 2002)

37. K. Koch, J. Ohser, K. Schladitz
Spectral theory for random closed sets and estimating the covariance via frequency space

Keywords: Random set, Bartlett spectrum, fast Fourier transform, power spectrum
(28 pages, 2002)

38. D. d'Humières, I. Ginzburg

Multi-reflection boundary conditions for lattice Boltzmann models

Keywords: lattice Boltzmann equation, boundary conditions, bounce-back rule, Navier-Stokes equation
(72 pages, 2002)

39. R. Korn

Elementare Finanzmathematik

Keywords: Finanzmathematik, Aktien, Optionen, Portfolio-Optimierung, Börse, Lehrerweiterbildung, Mathematikunterricht
(98 pages, 2002)

40. J. Kallrath, M. C. Müller, S. Nickel

Batch Presorting Problems: Models and Complexity Results

Keywords: Complexity theory, Integer programming, Assignment, Logistics
(19 pages, 2002)

41. J. Linn

On the frame-invariant description of the phase space of the Folgar-Tucker equation

Key words: fiber orientation, Folgar-Tucker equation, injection molding
(5 pages, 2003)

42. T. Hanne, S. Nickel

A Multi-Objective Evolutionary Algorithm for Scheduling and Inspection Planning in Software Development Projects

Key words: multiple objective programming, project management and scheduling, software development, evolutionary algorithms, efficient set
(29 pages, 2003)

43. T. Bortfeld, K.-H. Küfer, M. Monz, A. Scherrer, C. Thieke, H. Trinkaus

Intensity-Modulated Radiotherapy - A Large Scale Multi-Criteria Programming Problem

Keywords: multiple criteria optimization, representative systems of Pareto solutions, adaptive triangulation, clustering and disaggregation techniques, visualization of Pareto solutions, medical physics, external beam radiotherapy planning, intensity modulated radiotherapy
(31 pages, 2003)

44. T. Halfmann, T. Wichmann

Overview of Symbolic Methods in Industrial Analog Circuit Design

Keywords: CAD, automated analog circuit design, symbolic analysis, computer algebra, behavioral modeling, system simulation, circuit sizing, macro modeling, differential-algebraic equations, index
(17 pages, 2003)

45. S. E. Mikhailov, J. Orlik

Asymptotic Homogenisation in Strength and Fatigue Durability Analysis of Composites

Keywords: multiscale structures, asymptotic homogenization, strength, fatigue, singularity, non-local conditions
(14 pages, 2003)

46. P. Domínguez-Marín, P. Hansen, N. Mladenović, S. Nickel

Heuristic Procedures for Solving the Discrete Ordered Median Problem

Keywords: genetic algorithms, variable neighborhood search, discrete facility location
(31 pages, 2003)

47. N. Boland, P. Domínguez-Marín, S. Nickel, J. Puerto

Exact Procedures for Solving the Discrete Ordered Median Problem

Keywords: discrete location, Integer programming
(41 pages, 2003)

48. S. Feldmann, P. Lang

Padé-like reduction of stable discrete linear systems preserving their stability

Keywords: Discrete linear systems, model reduction, stability, Hankel matrix, Stein equation
(16 pages, 2003)

49. J. Kallrath, S. Nickel

A Polynomial Case of the Batch Presorting Problem

Keywords: batch presorting problem, online optimization, competitive analysis, polynomial algorithms, logistics
(17 pages, 2003)

50. T. Hanne, H. L. Trinkaus

knowCube for MCDM – Visual and Interactive Support for Multicriteria Decision Making

Key words: Multicriteria decision making, knowledge management, decision support systems, visual interfaces, interactive navigation, real-life applications.
(26 pages, 2003)

51. O. Iliev, V. Laptev

On Numerical Simulation of Flow Through Oil Filters

Keywords: oil filters, coupled flow in plain and porous media, Navier-Stokes, Brinkman, numerical simulation
(8 pages, 2003)

52. W. Dörfler, O. Iliev, D. Stoyanov, D. Vassileva
On a Multigrid Adaptive Refinement Solver for Saturated Non-Newtonian Flow in Porous Media

Keywords: Nonlinear multigrid, adaptive refinement, non-Newtonian flow in porous media
(17 pages, 2003)

53. S. Kruse

On the Pricing of Forward Starting Options under Stochastic Volatility

Keywords: Option pricing, forward starting options, Heston model, stochastic volatility, cliquet options
(11 pages, 2003)

54. O. Iliev, D. Stoyanov

Multigrid – adaptive local refinement solver for incompressible flows

Keywords: Navier-Stokes equations, incompressible flow, projection-type splitting, SIMPLE, multigrid methods, adaptive local refinement, lid-driven flow in a cavity
(37 pages, 2003)

55. V. Starikovicius

The multiphase flow and heat transfer in porous media

Keywords: Two-phase flow in porous media, various formulations, global pressure, multiphase mixture model, numerical simulation
(30 pages, 2003)

56. P. Lang, A. Sarishvili, A. Wirsén

Blocked neural networks for knowledge extraction in the software development process

Keywords: Blocked Neural Networks, Nonlinear Regression, Knowledge Extraction, Code Inspection
(21 pages, 2003)

57. H. Knaf, P. Lang, S. Zeiser

Diagnosis aiding in Regulation Thermography using Fuzzy Logic

Keywords: fuzzy logic, knowledge representation, expert system
(22 pages, 2003)

58. M. T. Melo, S. Nickel, F. Saldanha da Gama

Largescale models for dynamic multi-commodity capacitated facility location

Keywords: supply chain management, strategic planning, dynamic location, modeling
(40 pages, 2003)

59. J. Orlik

Homogenization for contact problems with periodically rough surfaces

Keywords: asymptotic homogenization, contact problems
(28 pages, 2004)

60. A. Scherrer, K.-H. Küfer, M. Monz, F. Alonso, T. Bortfeld

IMRT planning on adaptive volume structures – a significant advance of computational complexity

Keywords: Intensity-modulated radiation therapy (IMRT), inverse treatment planning, adaptive volume structures, hierarchical clustering, local refinement, adaptive clustering, convex programming, mesh generation, multi-grid methods
(24 pages, 2004)

61. D. Kehrwald

Parallel lattice Boltzmann simulation of complex flows

Keywords: Lattice Boltzmann methods, parallel computing, microstructure simulation, virtual material design, pseudo-plastic fluids, liquid composite moulding
(12 pages, 2004)

62. O. Iliev, J. Linn, M. Moog, D. Niedziela, V. Starikovicius

On the Performance of Certain Iterative Solvers for Coupled Systems Arising in Discretization of Non-Newtonian Flow Equations

Keywords: Performance of iterative solvers, Preconditioners, Non-Newtonian flow
(17 pages, 2004)

63. R. Ciegis, O. Iliev, S. Rief, K. Steiner

On Modelling and Simulation of Different Regimes for Liquid Polymer Moulding

Keywords: Liquid Polymer Moulding, Modelling, Simulation, Infiltration, Front Propagation, non-Newtonian flow in porous media
(43 pages, 2004)

64. T. Hanne, H. Neu
Simulating Human Resources in Software Development Processes
Keywords: Human resource modeling, software process, productivity, human factors, learning curve
(14 pages, 2004)

65. O. Iliev, A. Mikelic, P. Popov
Fluid structure interaction problems in deformable porous media: Toward permeability of deformable porous media
Keywords: fluid-structure interaction, deformable porous media, upscaling, linear elasticity, stokes, finite elements
(28 pages, 2004)

66. F. Gaspar, O. Iliev, F. Lisbona, A. Naumovich, P. Vabishchevich
On numerical solution of 1-D poroelasticity equations in a multilayered domain
Keywords: poroelasticity, multilayered material, finite volume discretization, MAC type grid
(41 pages, 2004)

67. J. Ohser, K. Schladitz, K. Koch, M. Nöthe
Diffraction by image processing and its application in materials science
Keywords: porous microstructure, image analysis, random set, fast Fourier transform, power spectrum, Bartlett spectrum
(13 pages, 2004)

68. H. Neunzert
Mathematics as a Technology: Challenges for the next 10 Years
Keywords: applied mathematics, technology, modelling, simulation, visualization, optimization, glass processing, spinning processes, fiber-fluid interaction, turbulence effects, topological optimization, multicriteria optimization, Uncertainty and Risk, financial mathematics, Malliavin calculus, Monte-Carlo methods, virtual material design, filtration, bio-informatics, system biology
(29 pages, 2004)

69. R. Ewing, O. Iliev, R. Lazarov, A. Naumovich
On convergence of certain finite difference discretizations for 1D poroelasticity interface problems
Keywords: poroelasticity, multilayered material, finite volume discretizations, MAC type grid, error estimates
(26 pages, 2004)

70. W. Dörfler, O. Iliev, D. Stoyanov, D. Vassileva
On Efficient Simulation of Non-Newtonian Flow in Saturated Porous Media with a Multigrid Adaptive Refinement Solver
Keywords: Nonlinear multigrid, adaptive refinement, non-Newtonian in porous media
(25 pages, 2004)

71. J. Kalcsics, S. Nickel, M. Schröder
Towards a Unified Territory Design Approach – Applications, Algorithms and GIS Integration
Keywords: territory design, political districting, sales territory alignment, optimization algorithms, Geographical Information Systems
(40 pages, 2005)

72. K. Schladitz, S. Peters, D. Reinelt-Bitzer, A. Wiegmann, J. Ohser
Design of acoustic trim based on geometric modeling and flow simulation for non-woven

Keywords: random system of fibers, Poisson line process, flow resistivity, acoustic absorption, Lattice-Boltzmann method, non-woven
(21 pages, 2005)

73. V. Rutka, A. Wiegmann
Explicit Jump Immersed Interface Method for virtual material design of the effective elastic moduli of composite materials
Keywords: virtual material design, explicit jump immersed interface method, effective elastic moduli, composite materials
(22 pages, 2005)

74. T. Hanne
Eine Übersicht zum Scheduling von Baustellen
Keywords: Projektplanung, Scheduling, Bauplanung, Bauindustrie
(32 pages, 2005)

75. J. Linn
The Folgar-Tucker Model as a Differential Algebraic System for Fiber Orientation Calculation
Keywords: fiber orientation, Folgar-Tucker model, invariants, algebraic constraints, phase space, trace stability
(15 pages, 2005)

76. M. Speckert, K. Dreßler, H. Mauch, A. Lion, G. J. Wierda
Simulation eines neuartigen Prüfsystems für Achserproben durch MKS-Modellierung einschließlich Regelung
Keywords: virtual test rig, suspension testing, multibody simulation, modeling hexapod test rig, optimization of test rig configuration
(20 pages, 2005)

77. K.-H. Küfer, M. Monz, A. Scherrer, P. Süß, F. Alonso, A. S. A. Sultan, Th. Bortfeld, D. Craft, Chr. Thieke
Multicriteria optimization in intensity modulated radiotherapy planning
Keywords: multicriteria optimization, extreme solutions, real-time decision making, adaptive approximation schemes, clustering methods, IMRT planning, reverse engineering
(51 pages, 2005)

78. S. Amstutz, H. Andrä
A new algorithm for topology optimization using a level-set method
Keywords: shape optimization, topology optimization, topological sensitivity, level-set
(22 pages, 2005)

79. N. Ettrich
Generation of surface elevation models for urban drainage simulation
Keywords: Flooding, simulation, urban elevation models, laser scanning
(22 pages, 2005)

80. H. Andrä, J. Linn, I. Matei, I. Shklyar, K. Steiner, E. Teichmann
OPTCAST – Entwicklung adäquater Strukturoptimierungsverfahren für Gießereien
Technischer Bericht (KURZFASSUNG)
Keywords: Topologieoptimierung, Level-Set-Methode, Gießprozesssimulation, Gießtechnische Restriktionen, CAE-Kette zur Strukturoptimierung
(77 pages, 2005)

81. N. Marheineke, R. Wegener
Fiber Dynamics in Turbulent Flows Part I: General Modeling Framework

Keywords: fiber-fluid interaction; Cosserat rod; turbulence modeling; Kolmogorov's energy spectrum; double-velocity correlations; differentiable Gaussian fields
(20 pages, 2005)

Part II: Specific Taylor Drag
Keywords: flexible fibers; $k-\varepsilon$ turbulence model; fiber-turbulence interaction scales; air drag; random Gaussian aerodynamic force; white noise; stochastic differential equations; ARMA process
(18 pages, 2005)

82. C. H. Lampert, O. Wirjadi
An Optimal Non-Orthogonal Separation of the Anisotropic Gaussian Convolution Filter
Keywords: Anisotropic Gaussian filter, linear filtering, orientation space, nD image processing, separable filters
(25 pages, 2005)

83. H. Andrä, D. Stoyanov
Error indicators in the parallel finite element solver for linear elasticity DDFEM
Keywords: linear elasticity, finite element method, hierarchical shape functions, domain decomposition, parallel implementation, a posteriori error estimates
(21 pages, 2006)

84. M. Schröder, I. Solchenbach
Optimization of Transfer Quality in Regional Public Transit
Keywords: public transit, transfer quality, quadratic assignment problem
(16 pages, 2006)

85. A. Naumovich, F. J. Gaspar
On a multigrid solver for the three-dimensional Biot poroelasticity system in multilayered domains
Keywords: poroelasticity, interface problem, multigrid, operator-dependent prolongation
(11 pages, 2006)

86. S. Panda, R. Wegener, N. Marheineke
Slender Body Theory for the Dynamics of Curved Viscous Fibers
Keywords: curved viscous fibers; fluid dynamics; Navier-Stokes equations; free boundary value problem; asymptotic expansions; slender body theory
(14 pages, 2006)

87. E. Ivanov, H. Andrä, A. Kudryavtsev
Domain Decomposition Approach for Automatic Parallel Generation of Tetrahedral Grids
Key words: Grid Generation, Unstructured Grid, Delaunay Triangulation, Parallel Programming, Domain Decomposition, Load Balancing
(18 pages, 2006)

88. S. Tiwari, S. Antonov, D. Hietel, J. Kuhnert, R. Wegener
A Meshfree Method for Simulations of Interactions between Fluids and Flexible Structures
Key words: Meshfree Method, FPM, Fluid Structure Interaction, Sheet of Paper, Dynamical Coupling
(16 pages, 2006)

89. R. Ciegis, O. Iliev, V. Starikovicius, K. Steiner
Numerical Algorithms for Solving Problems of Multiphase Flows in Porous Media
Keywords: nonlinear algorithms, finite-volume method, software tools, porous media, flows
(16 pages, 2006)

90. D. Niedziela, O. Iliev, A. Latz
On 3D Numerical Simulations of Viscoelastic Fluids

Keywords: non-Newtonian fluids, anisotropic viscosity, integral constitutive equation
(18 pages, 2006)

91. A. Winterfeld

Application of general semi-infinite Programming to Lapidary Cutting Problems

Keywords: large scale optimization, nonlinear programming, general semi-infinite optimization, design centering, clustering
(26 pages, 2006)

92. J. Orlik, A. Ostrovska

Space-Time Finite Element Approximation and Numerical Solution of Hereditary Linear Viscoelasticity Problems

Keywords: hereditary viscoelasticity; kern approximation by interpolation; space-time finite element approximation, stability and a priori estimate
(24 pages, 2006)

93. V. Rutka, A. Wiegmann, H. Andrä

EJIM for Calculation of effective Elastic Moduli in 3D Linear Elasticity

Keywords: Elliptic PDE, linear elasticity, irregular domain, finite differences, fast solvers, effective elastic moduli
(24 pages, 2006)

94. A. Wiegmann, A. Zemitis

EJ-HEAT: A Fast Explicit Jump Harmonic Averaging Solver for the Effective Heat Conductivity of Composite Materials

Keywords: Stationary heat equation, effective thermal conductivity, explicit jump, discontinuous coefficients, virtual material design, microstructure simulation, EJ-HEAT
(21 pages, 2006)

95. A. Naumovich

On a finite volume discretization of the three-dimensional Biot poroelasticity system in multilayered domains

Keywords: Biot poroelasticity system, interface problems, finite volume discretization, finite difference method
(21 pages, 2006)

96. M. Krekel, J. Wenzel

A unified approach to Credit Default Swap-tion and Constant Maturity Credit Default Swap valuation

Keywords: LIBOR market model, credit risk, Credit Default Swaption, Constant Maturity Credit Default Swap-method
(43 pages, 2006)

97. A. Dreyer

Interval Methods for Analog Circuits

Keywords: interval arithmetic, analog circuits, tolerance analysis, parametric linear systems, frequency response, symbolic analysis, CAD, computer algebra
(36 pages, 2006)

98. N. Weigel, S. Weihe, G. Bitsch, K. Dreßler
Usage of Simulation for Design and Optimization of Testing

Keywords: Vehicle test rigs, MBS, control, hydraulics, testing philosophy
(14 pages, 2006)

99. H. Lang, G. Bitsch, K. Dreßler, M. Speckert
Comparison of the solutions of the elastic and elastoplastic boundary value problems

Keywords: Elastic BVP, elastoplastic BVP, variational inequalities, rate-independency, hysteresis, linear kinematic hardening, stop- and play-operator
(21 pages, 2006)

100. M. Speckert, K. Dreßler, H. Mauch

MBS Simulation of a hexapod based suspension test rig

Keywords: Test rig, MBS simulation, suspension, hydraulics, controlling, design optimization
(12 pages, 2006)

101. S. Azizi Sultan, K.-H. Küfer

A dynamic algorithm for beam orientations in multicriteria IMRT planning

Keywords: radiotherapy planning, beam orientation optimization, dynamic approach, evolutionary algorithm, global optimization
(14 pages, 2006)

102. T. Götz, A. Klar, N. Marheineke, R. Wegener

A Stochastic Model for the Fiber Lay-down Process in the Nonwoven Production

Keywords: fiber dynamics, stochastic Hamiltonian system, stochastic averaging
(17 pages, 2006)

103. Ph. Süß, K.-H. Küfer

Balancing control and simplicity: a variable aggregation method in intensity modulated radiation therapy planning

Keywords: IMRT planning, variable aggregation, clustering methods
(22 pages, 2006)

104. A. Beaudry, G. Laporte, T. Melo, S. Nickel

Dynamic transportation of patients in hospitals

Keywords: in-house hospital transportation, dial-a-ride, dynamic mode, tabu search
(37 pages, 2006)

105. Th. Hanne

Applying multiobjective evolutionary algorithms in industrial projects

Keywords: multiobjective evolutionary algorithms, discrete optimization, continuous optimization, electronic circuit design, semi-infinite programming, scheduling
(18 pages, 2006)

106. J. Franke, S. Halim

Wild bootstrap tests for comparing signals and images

Keywords: wild bootstrap test, texture classification, textile quality control, defect detection, kernel estimate, nonparametric regression
(13 pages, 2007)

107. Z. Drezner, S. Nickel

Solving the ordered one-median problem in the plane

Keywords: planar location, global optimization, ordered median, big triangle small triangle method, bounds, numerical experiments
(21 pages, 2007)

108. Th. Götz, A. Klar, A. Unterreiter, R. Wegener

Numerical evidence for the non-existing of solutions of the equations describing rotational fiber spinning

Keywords: rotational fiber spinning, viscous fibers, boundary value problem, existence of solutions
(11 pages, 2007)

109. Ph. Süß, K.-H. Küfer

Smooth intensity maps and the Bortfeld-Boyer sequencer

Keywords: probabilistic analysis, intensity modulated radiotherapy treatment (IMRT), IMRT plan application, step-and-shoot sequencing
(8 pages, 2007)

110. E. Ivanov, O. Gluchshenko, H. Andrä, A. Kudryavtsev

Parallel software tool for decomposing and meshing of 3d structures

Keywords: a-priori domain decomposition, unstructured grid, Delaunay mesh generation
(14 pages, 2007)

111. O. Iliev, R. Lazarov, J. Willems

Numerical study of two-grid preconditioners for 1d elliptic problems with highly oscillating discontinuous coefficients

Keywords: two-grid algorithm, oscillating coefficients, preconditioner
(20 pages, 2007)

112. L. Bonilla, T. Götz, A. Klar, N. Marheineke, R. Wegener

Hydrodynamic limit of the Fokker-Planck-equation describing fiber lay-down processes

Keywords: stochastic differential equations, Fokker-Planck equation, asymptotic expansion, Ornstein-Uhlenbeck process
(17 pages, 2007)

113. S. Rief

Modeling and simulation of the pressing section of a paper machine

Keywords: paper machine, computational fluid dynamics, porous media
(41 pages, 2007)

114. R. Ciegis, O. Iliev, Z. Lakdawala

On parallel numerical algorithms for simulating industrial filtration problems

Keywords: Navier-Stokes-Brinkmann equations, finite volume discretization method, SIMPLE, parallel computing, data decomposition method
(24 pages, 2007)

115. N. Marheineke, R. Wegener

Dynamics of curved viscous fibers with surface tension

Keywords: Slender body theory, curved viscous bers with surface tension, free boundary value problem
(25 pages, 2007)

116. S. Feth, J. Franke, M. Speckert

Resampling-Methoden zur mse-Korrektur und Anwendungen in der Betriebsfestigkeit

Keywords: Weibull, Bootstrap, Maximum-Likelihood, Betriebsfestigkeit
(16 pages, 2007)

117. H. Knaf

Kernel Fisher discriminant functions – a concise and rigorous introduction

Keywords: wild bootstrap test, texture classification, textile quality control, defect detection, kernel estimate, nonparametric regression
(30 pages, 2007)

118. O. Iliev, I. Rybak

On numerical upscaling for flows in heterogeneous porous media

Keywords: numerical upscaling, heterogeneous porous media, single phase flow, Darcy's law, multiscale problem, effective permeability, multipoint flux approximation, anisotropy
(17 pages, 2007)

119. O. Iliev, I. Rybak

On approximation property of multipoint flux approximation method

Keywords: Multipoint flux approximation, finite volume method, elliptic equation, discontinuous tensor coefficients, anisotropy
(15 pages, 2007)

120. O. Iliev, I. Rybak, J. Willems
On upscaling heat conductivity for a class of industrial problems

Keywords: Multiscale problems, effective heat conductivity, numerical upscaling, domain decomposition
(21 pages, 2007)

121. R. Ewing, O. Iliev, R. Lazarov, I. Rybak
On two-level preconditioners for flow in porous media

Keywords: Multiscale problem, Darcy's law, single phase flow, anisotropic heterogeneous porous media, numerical upscaling, multigrid, domain decomposition, efficient preconditioner
(18 pages, 2007)

122. M. Brickenstein, A. Dreyer
POLYBORI: A Gröbner basis framework for Boolean polynomials

Keywords: Gröbner basis, formal verification, Boolean polynomials, algebraic cryptanalysis, satisfiability
(23 pages, 2007)

123. O. Wirjadi
Survey of 3d image segmentation methods

Keywords: image processing, 3d, image segmentation, binarization
(20 pages, 2007)

124. S. Zeytun, A. Gupta
A Comparative Study of the Vasicek and the CIR Model of the Short Rate

Keywords: interest rates, Vasicek model, CIR-model, calibration, parameter estimation
(17 pages, 2007)

125. G. Hanselmann, A. Sarishvili
Heterogeneous redundancy in software quality prediction using a hybrid Bayesian approach

Keywords: reliability prediction, fault prediction, non-homogeneous poisson process, Bayesian model averaging
(17 pages, 2007)

126. V. Maag, M. Berger, A. Winterfeld, K.-H. Küfer
A novel non-linear approach to minimal area rectangular packing

Keywords: rectangular packing, non-overlapping constraints, non-linear optimization, regularization, relaxation
(18 pages, 2007)

127. M. Monz, K.-H. Küfer, T. Bortfeld, C. Thieke
Pareto navigation – systematic multi-criteria-based IMRT treatment plan determination

Keywords: convex, interactive multi-objective optimization, intensity modulated radiotherapy planning
(15 pages, 2007)

128. M. Krause, A. Scherrer
On the role of modeling parameters in IMRT plan optimization

Keywords: intensity-modulated radiotherapy (IMRT), inverse IMRT planning, convex optimization, sensitivity analysis, elasticity, modeling parameters, equivalent uniform dose (EUD)
(18 pages, 2007)

129. A. Wiegmann
Computation of the permeability of porous materials from their microstructure by FFF-Stokes

Keywords: permeability, numerical homogenization, fast Stokes solver
(24 pages, 2007)

130. T. Melo, S. Nickel, F. Saldanha da Gama
Facility Location and Supply Chain Management – A comprehensive review

Keywords: facility location, supply chain management, network design
(54 pages, 2007)

131. T. Hanne, T. Melo, S. Nickel
Bringing robustness to patient flow management through optimized patient transports in hospitals

Keywords: Dial-a-Ride problem, online problem, case study, tabu search, hospital logistics
(23 pages, 2007)

132. R. Ewing, O. Iliev, R. Lazarov, I. Rybak, J. Willems
An efficient approach for upscaling properties of composite materials with high contrast of coefficients

Keywords: effective heat conductivity, permeability of fractured porous media, numerical upscaling, fibrous insulation materials, metal foams
(16 pages, 2008)

133. S. Gelareh, S. Nickel
New approaches to hub location problems in public transport planning

Keywords: integer programming, hub location, transportation, decomposition, heuristic
(25 pages, 2008)

134. G. Thömmes, J. Becker, M. Junk, A. K. Vaidantam, D. Kehrwald, A. Klar, K. Steiner, A. Wiegmann

A Lattice Boltzmann Method for immiscible multiphase flow simulations using the Level Set Method

Keywords: Lattice Boltzmann method, Level Set method, free surface, multiphase flow
(28 pages, 2008)

135. J. Orlik
Homogenization in elasto-plasticity

Keywords: multiscale structures, asymptotic homogenization, nonlinear energy
(40 pages, 2008)

136. J. Almquist, H. Schmidt, P. Lang, J. Deitmer, M. Jirstrand, D. Prätzel-Wolters, H. Becker
Determination of interaction between MCT1 and CAII via a mathematical and physiological approach

Keywords: mathematical modeling; model reduction; electrophysiology; pH-sensitive microelectrodes; proton antenna
(20 pages, 2008)

137. E. Savenkov, H. Andrä, O. Iliev
An analysis of one regularization approach for solution of pure Neumann problem

Keywords: pure Neumann problem, elasticity, regularization, finite element method, condition number
(27 pages, 2008)

138. O. Berman, J. Kalcsics, D. Krass, S. Nickel
The ordered gradual covering location problem on a network

Keywords: gradual covering, ordered median function, network location
(32 pages, 2008)

139. S. Gelareh, S. Nickel
Multi-period public transport design: A novel model and solution approaches

Keywords: Integer programming, hub location, public transport, multi-period planning, heuristics
(31 pages, 2008)

140. T. Melo, S. Nickel, F. Saldanha-da-Gama
Network design decisions in supply chain planning

Keywords: supply chain design, integer programming models, location models, heuristics
(20 pages, 2008)

141. C. Lautensack, A. Särkkä, J. Freitag, K. Schladitz
Anisotropy analysis of pressed point processes

Keywords: estimation of compression, isotropy test, nearest neighbour distance, orientation analysis, polar ice, Ripley's K function
(35 pages, 2008)

142. O. Iliev, R. Lazarov, J. Willems
A Graph-Laplacian approach for calculating the effective thermal conductivity of complicated fiber geometries

Keywords: graph laplacian, effective heat conductivity, numerical upscaling, fibrous materials
(14 pages, 2008)

143. J. Linn, T. Stephan, J. Carlsson, R. Bohlin
Fast simulation of quasistatic rod deformations for VR applications

Keywords: quasistatic deformations, geometrically exact rod models, variational formulation, energy minimization, finite differences, nonlinear conjugate gradients
(7 pages, 2008)

144. J. Linn, T. Stephan
Simulation of quasistatic deformations using discrete rod models

Keywords: quasistatic deformations, geometrically exact rod models, variational formulation, energy minimization, finite differences, nonlinear conjugate gradients
(9 pages, 2008)

145. J. Marburger, N. Marheineke, R. Pinnau
Adjoint based optimal control using mesh-less discretizations

Keywords: Mesh-less methods, particle methods, Eulerian-Lagrangian formulation, optimization strategies, adjoint method, hyperbolic equations
(14 pages, 2008)

146. S. Desmettre, J. Gould, A. Szimayer
Own-company stockholding and work effort preferences of an unconstrained executive

Keywords: optimal portfolio choice, executive compensation
(33 pages, 2008)

147. M. Berger, M. Schröder, K.-H. Küfer
A constraint programming approach for the two-dimensional rectangular packing problem with orthogonal orientations

Keywords: rectangular packing, orthogonal orientations non-overlapping constraints, constraint propagation
(13 pages, 2008)

148. K. Schladitz, C. Redenbach, T. Sych,
M. Godehardt

Microstructural characterisation of open foams using 3d images

Keywords: virtual material design, image analysis, open foams

(30 pages, 2008)

149. E. Fernández, J. Kalcsics, S. Nickel,
R. Ríos-Mercado

A novel territory design model arising in the implementation of the WEEE-Directive

Keywords: heuristics, optimization, logistics, recycling

(28 pages, 2008)

150. H. Lang, J. Linn

Lagrangian field theory in space-time for geometrically exact Cosserat rods

Keywords: Cosserat rods, geometrically exact rods, small strain, large deformation, deformable bodies, Lagrangian field theory, variational calculus

(19 pages, 2009)

151. K. Dreßler, M. Speckert, R. Müller,
Ch. Weber

Customer loads correlation in truck engineering

Keywords: Customer distribution, safety critical components, quantile estimation, Monte-Carlo methods

(11 pages, 2009)

152. H. Lang, K. Dreßler

An improved multiaxial stress-strain correction model for elastic FE postprocessing

Keywords: Jiang's model of elastoplasticity, stress-strain correction, parameter identification, automatic differentiation, least-squares optimization, Coleman-Li algorithm

(6 pages, 2009)

153. J. Kalcsics, S. Nickel, M. Schröder

A generic geometric approach to territory design and districting

Keywords: Territory design, districting, combinatorial optimization, heuristics, computational geometry

(32 pages, 2009)

154. Th. Fütterer, A. Klar, R. Wegener

An energy conserving numerical scheme for the dynamics of hyperelastic rods

Keywords: Cosserat rod, hyperealstic, energy conservation, finite differences

(16 pages, 2009)

155. A. Wiegmann, L. Cheng, E. Glatt, O. Iliev, S.
Rief

Design of pleated filters by computer simulations

Keywords: Solid-gas separation, solid-liquid separation, pleated filter, design, simulation

(21 pages, 2009)

Status quo: April 2009